

Magnetic drive pumps

MDF-L series



Patent

EU / JAPAN / U.S.A. / TAIWAN / KOREA



MDF-L magnetic drive pumps for chemical processing

Already one of our best selling pump ranges they have proved their reliability over many years in many countries. Our continuous development ensures the highest possible efficiency in a chemical processing pump, whilst retaining high levels of corrosion resistance durability and safety.

High corrosion resistance

Ethylene-Tetrafluoroethylene copolymer (ETFE) is used in the main material of the wet end parts. This material is known for its high resistance to corrosion among the fluororesins in injection molding and it almost equals PTFE in chemical resistance particularly against hot concentrated sulphuric acids, fuming sulphuric acid, concentrated nitric acid, hot chromic acid, and strong alkaline liquids. We use the latest anti-corrosion materials in the manufacture of the spindle, bearing and mouth ring, which combined with leak-free seal-less structures, ensure the safe transfer of strong acids and strong alkaline liquids.

Dry running is not a problem with our pin-point contact system.

In conventional magnetic drive pumps, the inner parts of the pump are often melted due to heat and lubrication problems between the rear bearing surface and the rear casing, caused by dry running.

Solid construction with excellent durability

ETFE, the main material, is filled with carbon fiber to increase its mechanical strength. The exterior of the pump is entirely covered by cast iron. Reliability is assured for continued operation under adverse conditions.

High-efficiency/energy-saving design

The maximum pump efficiency reaches 50-55%, the highest level for resin pumps. In designing the pump, energy-saving was taken into full consideration.



MDF-L401


MDF-L250

The patented pin-point contact system is making the magnetic drive pumps tough for dry running

Iwaki's pump technology has produced an innovative magnetic drive pump which incorporates an extremely high resistance to dry running. By employing the newly developed pin-point contact system, dry running which was unavailable with previous models is now a feature on the new magnetic drive pump series.

Pin-point contact system


In a no-thrust condition due to dry run, only the impeller thrust surface and spindle front face come in contact. The magnet capsule never touches the rear casing. This "pin-point" contact between impeller and spindle thrust surfaces significantly minimizes friction, and therefore heat generation.

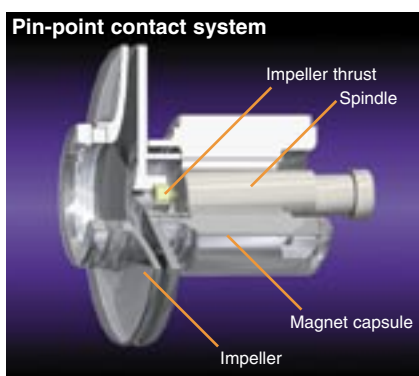

Patents
Europe / Japan / Taiwan / U.S.A. / Korea



Construction and materials

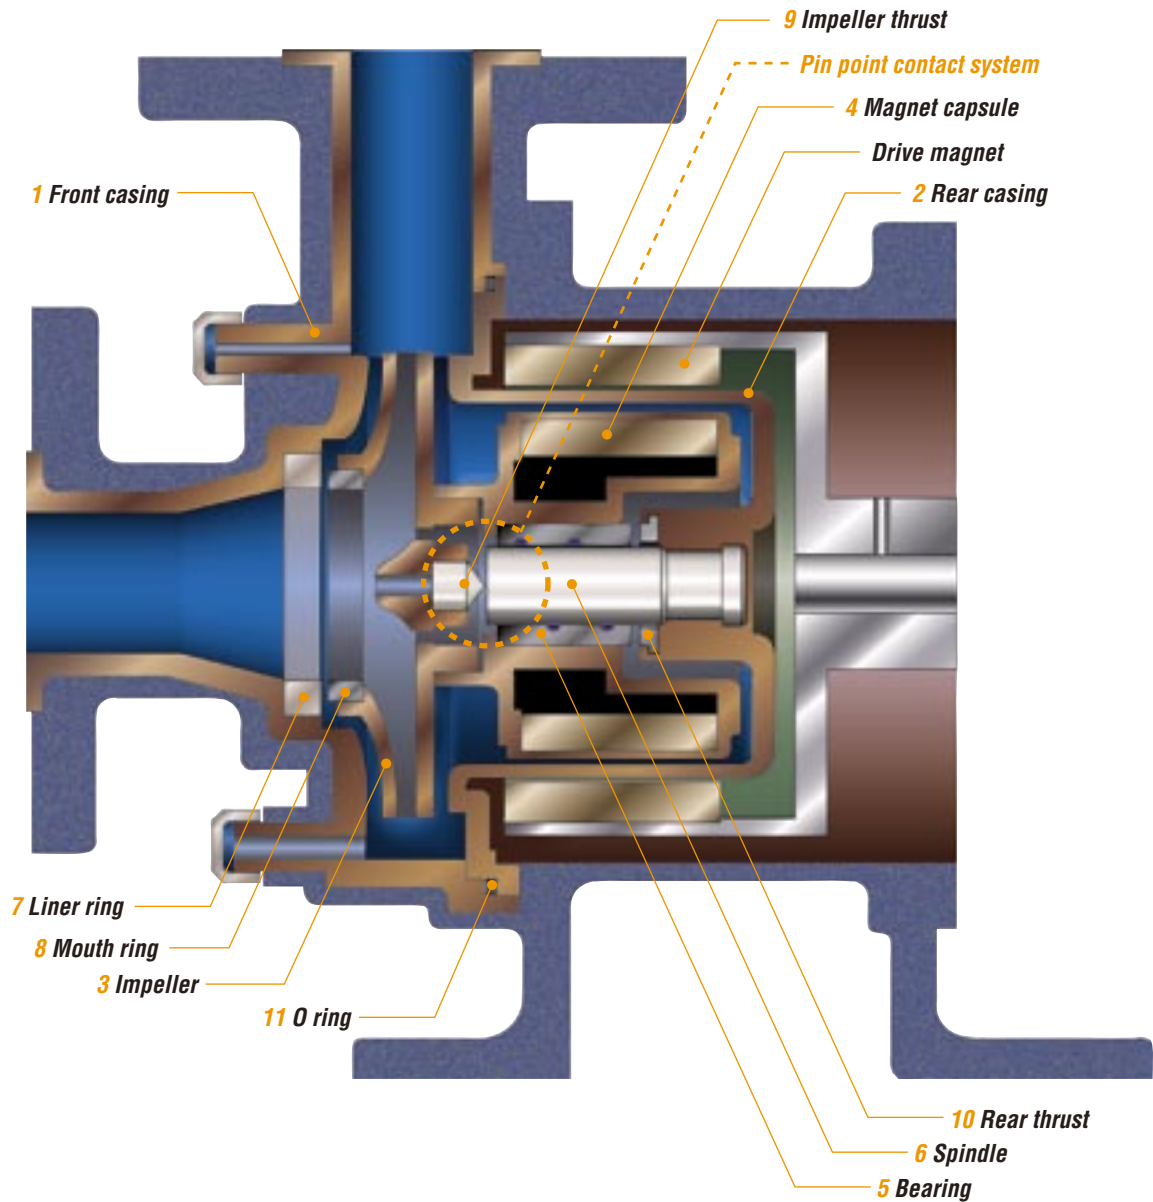


Wet-end materials

Part	Material code	CF -D	AA -E	KK -E	Note
1 Front casing					
2 Rear casing					
3 Impeller					
4 Magnet capsule					
5 Bearing		High-density carbon	High-purity alumina ceramic		
6 Spindle					
7 Liner ring		High-purity alumina ceramic			
8 Mouth ring		PTFE			
9 Impeller thrust		High-purity alumina ceramic			
10 Rear thrust		High-purity alumina ceramic			
11 O ring			FKM/EPDM/AFLAS®		

Note : MDF-L401*KK* type is not available. Please contact us for details.


Impeller thrust

When dry running happens, the impeller thrust and the spindle front part come into contact.



Bearing

The bearing is a one-piece and press-fit type. Replacement is possible when required.



Spindle

The spindle is integrally molded with the rear casing to form a cantilever structure. Without any supporting boss in the suction port, the pump efficiency is increased and the NPSHr is reduced.



Impeller

The impeller is a closed type designed for maximum efficiency. Different impeller sizes are available as standard, which adds greater latitude in handling liquids of high specific gravity.



Magnet capsule


High-power magnets are thoroughly molded in the resin to provide sufficient corrosion resistance and torque.

(Rare earth magnet is used in the 422,423 and 425 type.)



Pump identification

MDF-L 42 2 CF V K - D H1 S

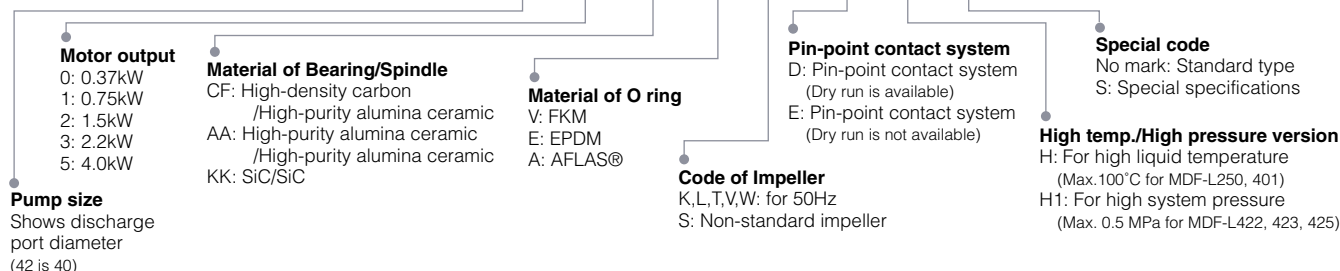

Specifications

50Hz

Model	Nominal bore size Suction X Discharge mm	50Hz			Motor Output kW	* Mass (Less motor) kg
		Impeller size	Head m	Capacity L/min		
MDF-L250	25 X 25	K	12.2	50	0.37	25(14)
		T	7.3			
		V	5.6	150		
		W	3.0			
MDF-L401	40 X 40	K	16.8	100	0.75	34(22)
		T	9.5	200		
		V	8.3			
		W	4.8			
MDF-L422	50 X 40	K	20	200	1.5	42(26)
		T	18			
		V	14			
		W	10			
MDF-L423	50 X 40	K	28.5	150	2.2	45(26)
		L	21.5			
		T	19.5	300		
		V	15			
W	11.5					
MDF-L425	50 X 40	T	25.5	400	4.0	55(28)
		V	21			
		W	11			

Temperature range of liquid handled (MDF-L250/401) : 0 to 90°C. 10 to 90°C when AFLAS® O ring is used. (Up to 100°C possible on special order)


Temperature range of liquid handled (MDF-L422-425) : 0 to 100°C. 10 to 100°C when AFLAS® O ring is used.

Allowable slurry (AA and KK type) : Hardness: Below 80HS, Particle size: Below 50m (Concentration up to 5wt%)


Casing cover : Cast iron FC200

*Mass (weight with motor) vary depending on motor installed.

Performance curves

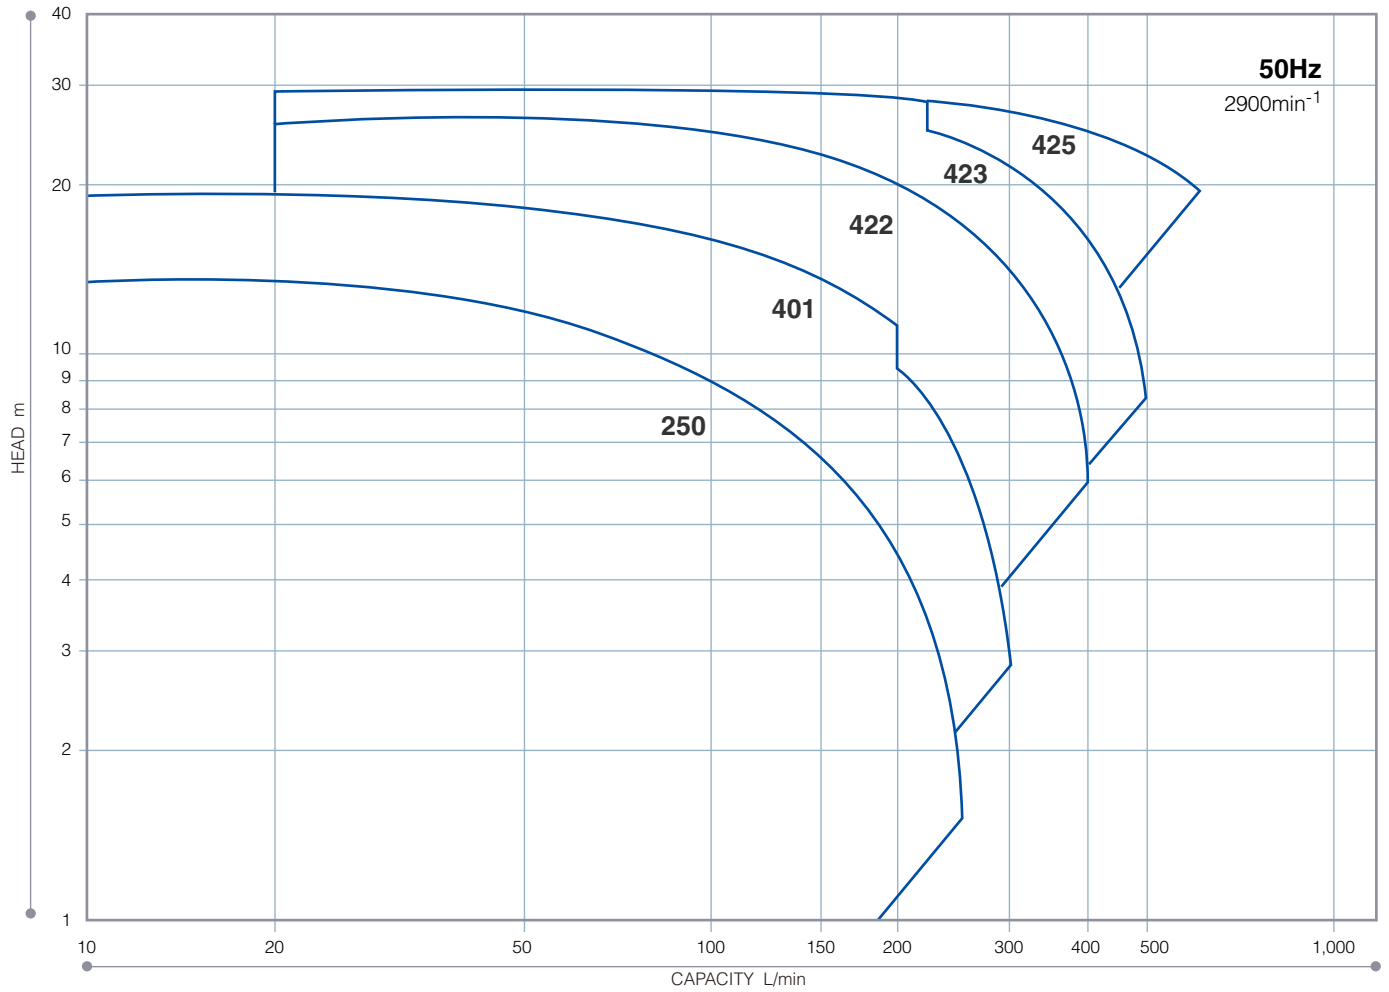

Dimensions

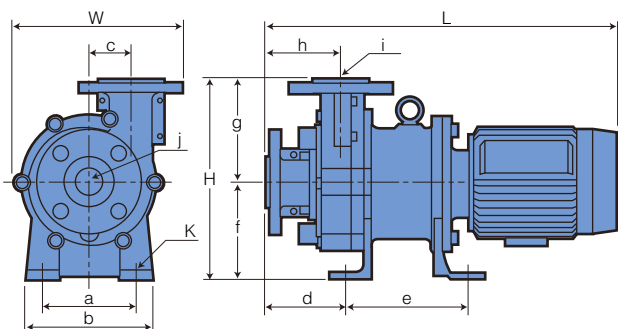

Model	W	H	L	a	b	c	d	e	f	g	h	i	j	K
MDF-L250	205	237	439	110	150	51	95	143	115	122	88	25	25	4-ø12
MDF-L401	233	275	523	130	170	58	113	250	135		106		40	
MDF-L422			557							140		40		4-ø14
MDF-L423	251	295		140	180	65	106	275	155		87		50	
MDF-L425			618											

Note : Dimensions vary depending on motor installed.

Care to be taken in selecting type of pump

- (1) The performance curves show when pumping clear water at room temperature.
- (2) An impeller size suitable for the specific gravity of the liquid to be handled should be selected. When selecting, add a 5-10% allowance to the motor output.
 Pump shaft power SP X Specific gravity of liquid X 1.05 to 1.1 as allowance \leq Motor output
 (Note: Motor shaft power Sp rises in proportion to the specific gravity of liquid. Also if the liquid viscosity increases, required shaft power increases while pump discharge capacity and head decrease. Therefore the correction of pump performance must be done together with the correction of pump shaft power.)

- (3) Continuous operation with a closed discharge is not permissible with magnet drive pumps. A minimum flow rate must be maintained, as given below:

Model	250•401	422•423	425
Maximum flow rate	10L/min	20L/min	50L/min

- (4) How to determine suction conditions (NPSH)•••Prevention of cavitation

Select an NPSHa value so that $NPSHa \geq NPSHr \times 1.05$ / Allowance

$$NPSHa = \frac{10^6(Pa - Pv)}{\rho g} - hs - hf$$

Pa : Pressure applied to surface of supply liquid MPa

Pv : Vapor pressure of liquid MPa

ρ : Liquid density kg/m³

hs : Height of suction m

hf : Suction pipe resistance m

g : Acceleration due to gravity 9.8m/s²

γ : Specific gravity of liquid

NPSHa : Available NPSH m

NPSHr : Required NPSH m

(Note : Refer to the performance curve for the selection of NPSHr.)

- (5) Pump casing pressure limit.

The pumps have the following casing pressure limits:

Model	250	401	422 423	425
Maximum pressure rating MPa	0.16	0.24	0.4	0.45

$$P = \frac{\rho g(H_{max} - h_s)}{10^6} \text{ MPa}$$

P : Internal pressure of pump MPa

ρ : Liquid density kg/m³

g : Acceleration due to gravity 9.8m/s²

Hmax : Pump maximum discharge head m

hs : Suction head m

(Note: For MDF-L422, 423, 425, higher casing pressure type of 0.5MPa is available on request.)

- (6) In case of pump performance curve where max. head does not occur at shut off point (For example MDF-L423 with "W" impeller)

For the pump model of which the performance curve shows ascending line in the small flow range, it is recommended the pump is not used at ascending range of performance curve. If the pump is obliged to be used in this range, piping must be done paying attention to the following points.

(1) No air trap should be in discharge piping.

(2) Flow rate adjustment should be done by means of the valve located just after the pump.

Iwaki dry running protector

DR series (Option)

Model DR is electric current sensing type dry running protector. It detects the decreased load current (lower limit) to stop the pump when it runs dry or runs with air sucking in. It can detect over-load, too.

- Current figure to be set is indicated on LCD.
- Both top/bottom figures can be set.
 Top: Over-load
 Bottom: Dry running, air sucking-in operation, operation with suction side closed
- Built-in current transformer (DR-20)
- DIN rail mounting



DR-20

Specification

Model	DR-20	DR-21
Motor power	380 to 440V	
Applied motor	0.75 to 15kW	18.5 to 75kW
Power	200 to 240V 10% shingle phase	
45-65Hz	V Input	3.5W
Detective current	0.5 to 32.0A	20 to 200A
Current transformer(CT)	Built-in	External
Current range	Auto : 4.4/17.6/32A	0 to 200A
	Manual : 2.2/4.4/8.8/11/17.6/26.4/32A	
Ambient	Temperature: 0 to 40°C Humidity: RH40 to 85%	
Outer dimension	D80 X W153 X H110	




Current transformer 200AT (For DR-21)

Iwaki process magnetic drive pump series

MDM SERIES

Magnetic drive process pumps
with dry running capability

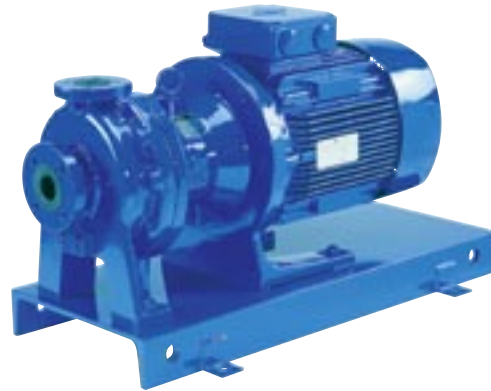**Specifications**

- Max. discharge capacity: 1.4m³/min
- Max. head: 74m
- Main materials: CFRETFE/PFA
- Liquid temp. range: -20 to 105°C(CFRETFE), -20 to 150°C(PFA)

MX SERIES

Withstands difficult operating conditions
and offers high efficiency

**Specifications**

- Max. discharge capacity: 500L/min
- Max. head: 35m(MX), 30m(MX-F)
- Main materials: GFRPP(MX), CFRETFE(MX-F)
- Liquid temp. range: 0 to 80°C

YMD SERIES

Stainless steel magnet pumps with
compact size and simple structure

**Specifications**

- Max. discharge capacity: 660L/min
- Max. head: 67m
- Main materials: SUS316
- Liquid temp. range: 0 to 120°C

www.iwakupumps.jp

IWAKI CO.,LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892

EUROPE / U.S.A.

European office	: IWAKI Europe GmbH	TEL: (49)2154 9254 0	FAX: 2154 9254 48
Austria	: IWAKI (Austria) GmbH	TEL: (41)26 674 93 00	FAX: 26 674 93 02
Belgium	: IWAKI Belgium N.V.	TEL: (32)13 67 02 00	FAX: 13 67 20 30
Denmark	: IWAKI Nordic A/S	TEL: (45)48 24 2345	FAX: 48 24 2346
Finland	: IWAKI Suomi Oy	TEL: (359)9 2745810	FAX: 9 2742715
France	: IWAKI France S.A.	TEL: (33)1 69 63 33 70	FAX: 1 64 49 92 73
Germany	: IWAKI Europe GmbH	TEL: (49)2154 9254 50	FAX: 2154 9254 55
Holland	: IWAKI Holland B.V.	TEL: (31)297 241121	FAX: 297 273902
Italy	: IWAKI Italia S.R.L.	TEL: (39)02 990 3931	FAX: 02 990 42888
Norway	: IWAKI Norge AS	TEL: (47)66 81 16 60	FAX: 66 81 16 61
Spain	: IWAKI Iberica Pumps, S.A.	TEL: (34)943 630030	FAX: 943 628799
Sweden	: IWAKI Sverige AB	TEL: (46)8 511 72900	FAX: 8 511 72922
Switzerland	: IWAKI (Schweiz) AG	TEL: (41)26 674 93 00	FAX: 26 674 93 02
U.K.	: IWAKI Pumps (UK) Ltd.	TEL: (44)1743 231363	FAX: 1743 366507
U.S.A.	: IWAKI America Inc.	TEL: (1)508 429 1440	FAX: 508 429 1386

ASIA / OCEANIA

Australia	: IWAKI Pumps Australia Pty Ltd.	TEL: (61)2 9899 2411	FAX : 2 9899 2421
China			()Country codes
Hong Kong	: IWAKI Pumps Co., Ltd.	TEL: (852)2607 1168	FAX: 2607 1000
Shanghai	: IWAKI Pumps (Shanghai) Co., Ltd.	TEL: (86)21 6272 7502	FAX: 21 6272 6929
Guangzhou	: GFTZ IWAKI Engineering & Trading Co., Ltd.	TEL: (86)20 8435 0603	FAX: 20 8435 9181
Beijing	: GFTZ Iwaki Engineering & Trading Co., Ltd. (Beijing office)	TEL: (86)10 6442 7713	FAX: 10 6442 7712
Korea	: IWAKI Korea Co.,Ltd.	TEL: (82)2 2630 4800	FAX: 2 2630 4801
Malaysia	: IWAKIm Sdn. Bhd.	TEL: (60)3 7803 8807	FAX: 3 7803 4800
Singapore	: IWAKI Singapore Pte Ltd.	TEL: (65)6316 2028	FAX: 6316 3221
Indonesia	: IWAKI Singapore (Indonesia Branch)	TEL: (62)21 6906606	FAX: 21 6906612
Taiwan	: IWAKI Pumps Taiwan Co., Ltd.	TEL: (886)2 8227 6900	FAX: 2 8227 6818
Thailand	: IWAKI (Thailand) Co.,Ltd.	TEL: (66)2 322 2471	FAX: 2 322 2477
Vietnam	: IWAKI Pumps Vietnam Co., Ltd.	TEL: (84)613 933456	FAX: 613 933399



Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly.
Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.