

Electromagnetic metering pumps

The latest electromagnetic metering pump
equipped with digital controller & multi-voltage



EHN Series is the latest electromagnet drive & diaphragm type metering pump. Pump head and driving mechanism employ those of experienced EH-R Series pumps while control unit is newly developed.



The latest electromagnetic metering pump equipped with digital controller & multi-voltage

EHN Series is the latest electromagnet drive & diaphragm type metering pump. Pump head and driving mechanism employ those of experienced EH-R Series pumps while control unit is newly developed. Multi-voltage from 100 to 240V and digitized EHN Series pump is easy to operate in a variety of chemical feeding application.



VC/VH type

FC type

SH type

Multi-voltage power source

Multi-voltage power source from AC100 to 240V for all models. You are now free from worrying about power voltage.

High resolution

Thanks to digitized controller, stroke speed can be adjusted by 1 spm step from 1 to 360 spm. Combined with stroke length adjustment, you can do the fine adjustment from very small flow to maximum flow rate.

Pump head variation

Wide variety of standard pump head (VC/VH), automatic air bleeding type (NAE) and high compression type (55 model).


- Refer to page 5 for details of NAE and 55.



Stroke length adjusting dial



Control panel

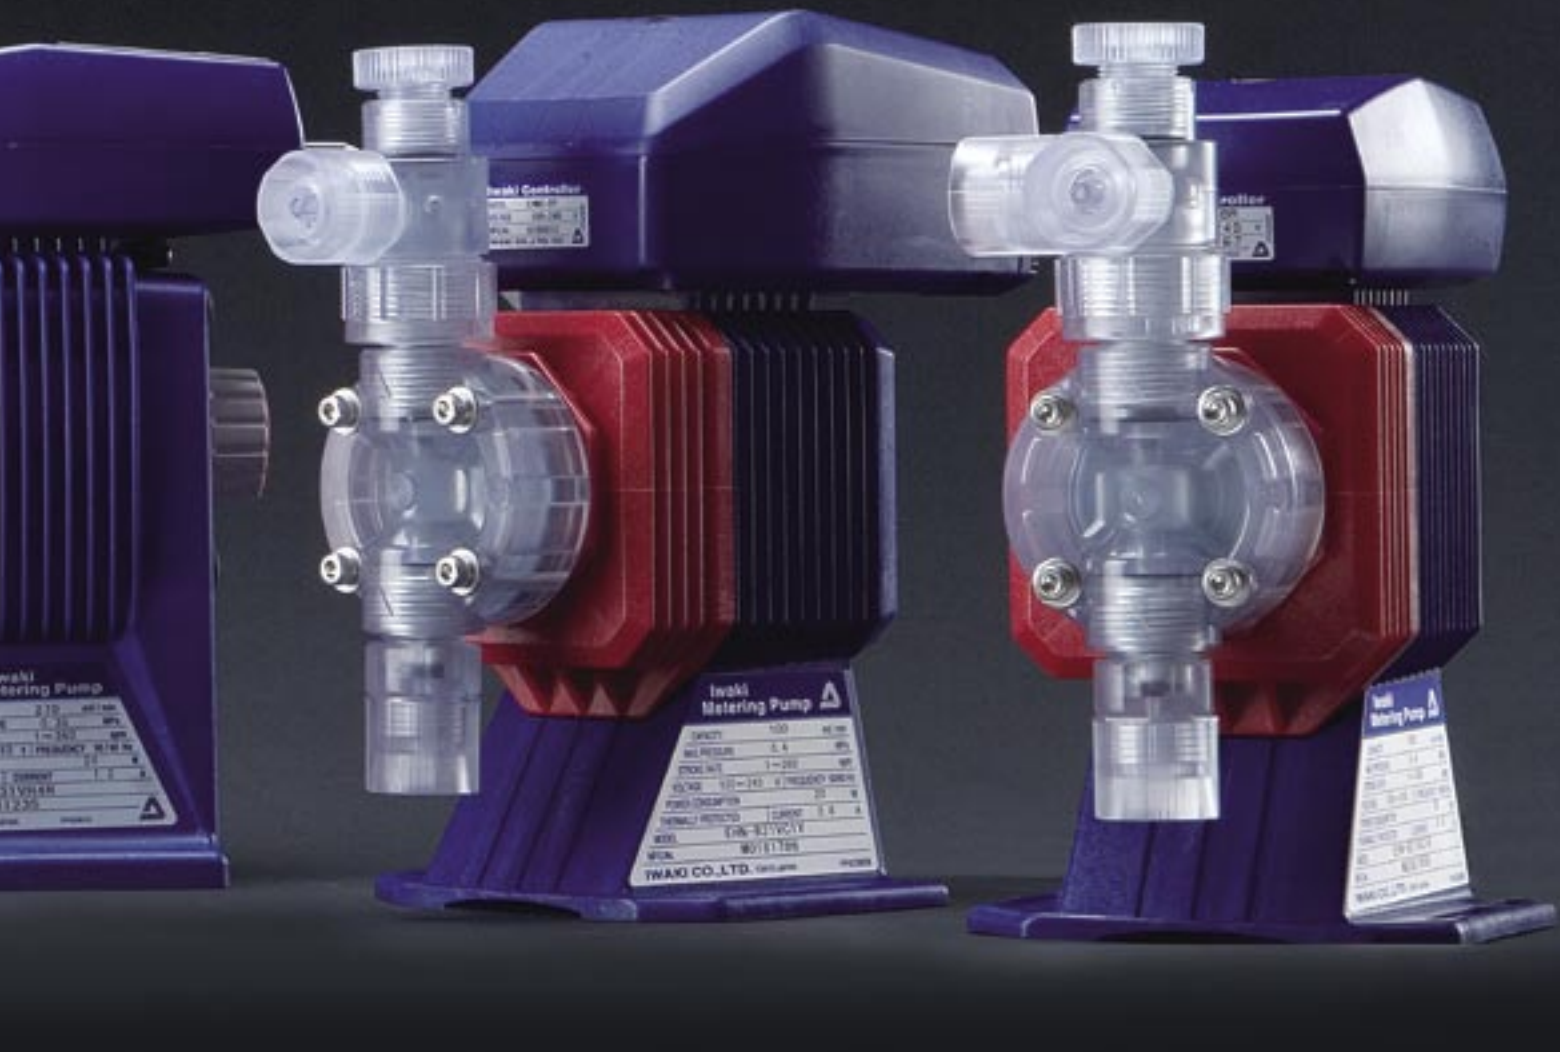

Control unit

The highly-functional EHN-Y which is equipped with digital and analogue inputs are added to the standard production line as well as EHN-R.

Air vent valve

Small flow capacity models (EHN-11, 16 & 21) equip air vent valve. Air in the pump chamber can be easily released by turning knob.



Water/dust-proof

Each unit such as driving unit and control unit is sealed to make the pump IP66 equivalent water/dust-proof.

- Do not install pump outdoor.

Various combinations of the controller and the pump head meet a wide range of application requirement.

Basic type

EHN-R series

The basic model of the EHN series. Key lock function prevents erroneous operation after controller programming. The mounted controller provides EXT and STOP functions. Multiply and dividing operations becomes newly available by EXT functions and allows you to delicate pump control.



Controller function


Manual operation

Pump run/stop and stroke rate setting (1 to 360 spm) can be done by keys. Stroke rate can be set either when pump is running or stopped.

EXT operation


Multiply (1 : n)

Pump makes multiply operation by external pulse signal. Pump makes "n" times shots against one pulse signal input. "n" can be set from 1 to 999. Pulses which came while operation are put in memory up to 255 pulses.

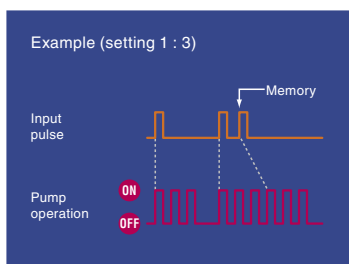

Dividing (n : 1)

Pump makes dividing operation by external pulse signal. Pump makes one shot against "n" times pulse input. "n" can be set from 1 to 999.

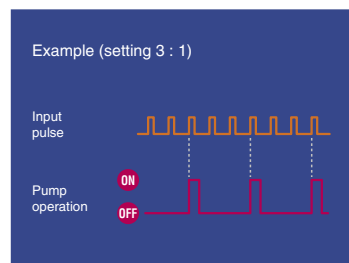


- If "n" is set at 1, pump makes synchronous operation. If pump is connected to optionally available EH controller, please use this function.

STOP function

Pump stops by external contact signal. Pump operates when stop signal input is released. This function enables pump ON/OFF control. This is convenient function when used in combination with level sensor.

- It is possible to operate pump while STOP signal comes in (Change over with keys). In this case, when pump is operated in EXT mode, pump operates synchronous with EXT signal input while STOP signal is coming in.

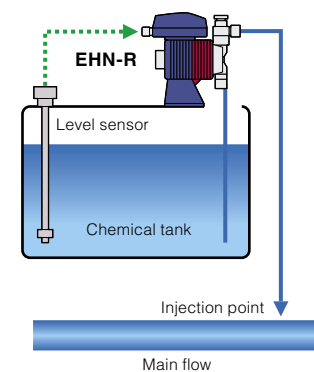

Level sensor watches water level in tank, and stops pump when water level comes to lower limit.

Digital/Analogue correspondence

EHN-Y type

Analogue input operation is also available as well as Manual and EXT (Multiply and dividing) operation. STOP function is also provided to control the pump via an external contact signal. DC 12V built-in sensor power is a standard feature.





Controller function

Manual operation

Pump run/stop and stroke rate setting (1 to 360 spm) can be done by keys. Stroke rate can be set either when pump is running or stopped.

Analogue input operation

Proportional control of spm by programming 2 points between 0-20mA.

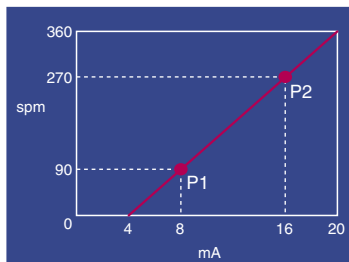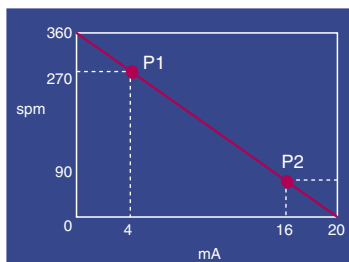

EXT operation

Multiply (1 : n)

Pump makes multiply operation by external pulse signal. Pump makes "n" times shots against one pulse signal input. "n" can be set from 1 to 999. Pulses which came while operation are put in memory up to 255 pulses.

Dividing (n : 1)

Pump makes dividing operation by external pulse signal. Pump makes one shot against "n" times pulse input. "n" can be set from 1 to 999.

- If "n" is set at 1, pump makes synchronous operation. If pump is connected to optionally available EH controller, please use this function.

STOP function

Pump stops by external contact signal. Pump operates when stop signal input is released. This function enables pump ON/OFF control. This is convenient function when used in combination with level sensor.

- It is possible to operate pump while STOP signal comes in (Change over with keys). In this case, when pump is operated in EXT mode, pump operates synchronous with EXT signal input while STOP signal is coming in.

The pump can be specialized for the need of a special chemical transfer.

The optimum for gaseous liquid feeding


Automatic air vent type

EHN-NAE

This type equips automatic air vent mechanism. An air vent valve built-in pump chamber enables reliable air venting. Also equipped manual air vent valve enables easy pressure release in discharge piping. Gaseous liquid such as sodium hypochlorite or hydrogen peroxide can be injected without gas locking.



Principle of operation (NAE type)

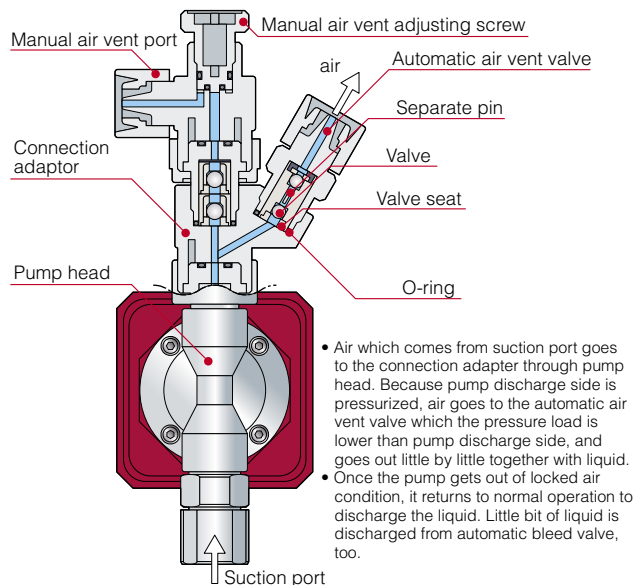

Wet-end material

Material code	VC	VH
Pump head	PVC	
Connection adaptor	PVC	
Separate pin	Titanium	Hastelloy C276
Valve	Alumina ceramic	Hastelloy C276
Valve seat	FKM	EPDM
O-ring	FKM	EPDM

Specification

Model	EHN-B11-NAE	EHN-B16-NAE	EHN-C21-NAE	
Max. discharge capacity	mL/min	30	55	110
Discharge capacity per shot	mL/shot	0.04 - 0.08	0.08 - 0.15	0.12 - 0.31
Max. discharge pressure	MPa	1.0		0.7
Stroke length adjustable range	%	50 - 100		40 - 100
Stroke rate	spm	1 - 360		
Connection (Hose dia.)	Ø4 × Ø9			
Power voltage	AC100 - 240V 50/60Hz single phase			
Accessory	Check valve CA-1, PVC braided hose 3m			

Operating condition : Liquid temperature 0 - 40 °C. Ambient temperature 0 - 40 °C
 • Max. discharge capacity represents the figure when pumping clear water at ambient temperature at max. discharge pressure. Pump discharges more liquid than shown above if it runs at lower discharge pressure. If discharge pressure is 0.12MPa or lower, be sure to use check valve to avoid over-feeding.

The optimum for sodium hypochlorite feeding


High compression head type

EHN-55

Increased compression ratio due to minimized dead volume in pump chamber. Suitable for injection of boiler chemicals such as hydrazine or so.



Construction (55 type)

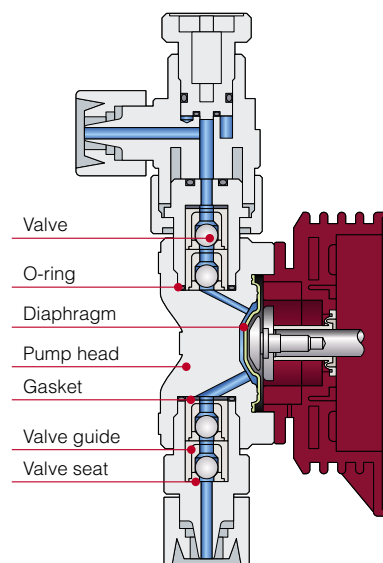

Wet-end material

Material code	VC
Pump head	PVC
Valve	Alumina ceramic
Valve seat	FKM
Valve guide	PVC
Gasket	PTFE
O-ring	FKM
Diaphragm	PTFE coated EPDM

Specification

Model	EHN-B11VC-55	EHN-B21VC-55	
Max. discharge capacity	mL/min	38	100
Discharge capacity per shot	mL	0.05 - 0.11	0.14 - 0.28
Max. discharge pressure	MPa	1.0	0.4
Stroke length adjustable range	%	50 - 100	
Stroke rate	spm	1 - 360	
Connection (Hose dia.)	Ø4 × Ø9		
Power voltage	AC100 - 240V 50/60Hz single phase		
Accessory	Check valve CA-1, PVC braided hose 3m		

Operating condition: Liquid temperature 0 - 40 °C. Ambient temperature 0 - 40 °C
 • Max. discharge capacity represents the figure when pumping clear water at ambient temperature at max. discharge pressure. Pump discharges more liquid than shown above if it runs at lower discharge pressure. If discharge pressure is 0.12MPa or lower, be sure to use check valve to avoid over-feeding.

The EHN series meets the needs of various chemical feeding in water treatment fields.

Injection of boiler compound into through flow boiler EHN-R

Because the pump can inject very small capacity, pure boiler compound can be injected without diluting.

CT-U25N/50NR Tank

Boiler compound

A Injection to discharge side of feeding pump
B Injection to suction side of feeding pump

Water softener Feeding pump

Water

Boiler

Steam

Metering dose EHN-R | EHN-Y

Pump operates at pre-set number of shots by receiving signal from proximity switch. Number of shot can be set from 1 - 999.

CT-U Tank

EHN-R
EHN-Y

Proximity switch

Proximity switch stops vessel or starts injection.

Sterilizing of swimming pool water (Residual chlorine concentration control) EHN-R

Continuous injection of sodium hypo-chlorite. Combined with Chlorine sterilizer, residual chlorine concentration can be controlled precisely.

Balancing tank

Swimming pool

Hair catcher

Filtration pump

Check valve

Filter

CT-U120N Tank

Residual chlorine sensor

Residual chlorine meter

Waste water

Pulse signal

Automatic chlorine sterilizer IMP series

EHN-R

• Please refer to the single goods catalog of the separate volume for details of the IMP series.

Electroless plating system (Planting solution supply/ Conductivity control of cleaning water) EHN-R

Conductivity controller TC-300

SV

Solenoid valve

Conductivity sensor

Pure water washing bath

Washing bath

Plating solution bath

EHN-R
CT-U Tank

• Please refer to the single goods catalog of the separate volume for details of the TC-300.

Sterilizing of distilled water (Proportional mixing of cleaning water and sterilizing agent) EHN-R | EHN-Y

Pump injects sterilizing agent in proportion to the flow rate of cleaning water by the signal from pulse oscillating flow meter. Same mixing concentration can be kept regardless of the change of cleaning water flow rate.

Main flow (Cleaning water)

Pulse oscillating flow meter

Line mixer

Check valve

CT-U Tank


Sterilant

Pulse signal

Nozzle

EHN-R, EHN-Y

Technical data

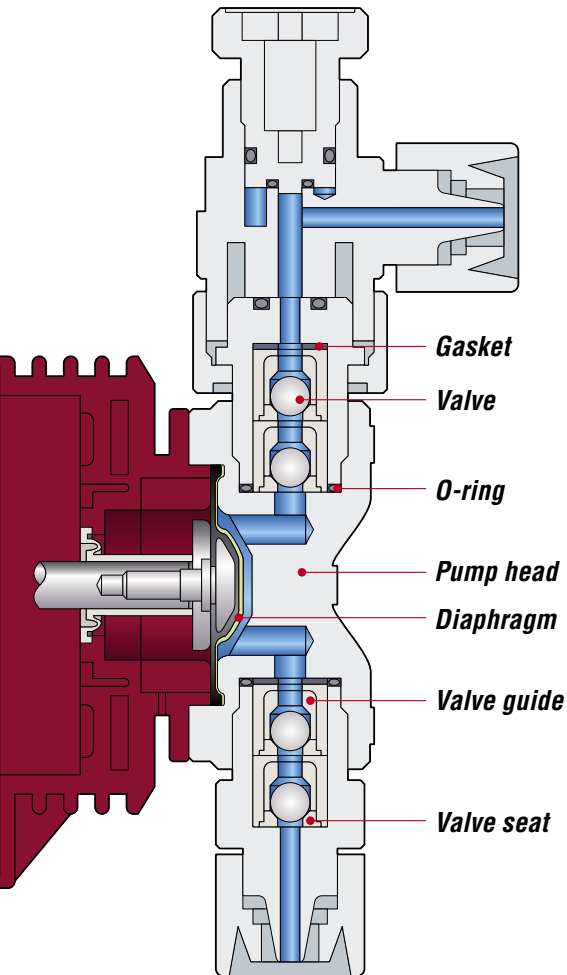

Construction and materials

Material symbol	VC	VH	FC	SH
Pump head	PVC	PVC	PVDF	SUS316
Valve	Alumina ceramic	Hastelloy C276	Alumina ceramic	Hastelloy C276
Valve seat	FKM	EPDM	PCTFE	SUS316
Valve guide	PVC	PVC	PVDF	SUS316
Gasket	PTFE			
O-ring	FKM	EPDM	-	-
Diaphragm	PTFE+EPDM (EPDM of diaphragm is not wet-end.)			

PVC: Transparent polyvinyl chloride

FKM: Fluor rubber

EPDM: Ethylene-propylene-diene-methylene

PCTFE: Polychlorotrifluoroethylene

PTFE: Poytetrafluoro ethylene

PVDF: Poly vinylidene fluoride

Pump identification

(VC/VH)

EHN - B 11 VC 1 R - NAE

- Drive unit code**
(Average power consumption)
B: 20W
C: 24W
- Diaphragm effective diameter**
11: 10mm
16: 15mm
21: 20mm
31: 30mm
36: 35mm
- Wet-end material code**
VC, VH
- Connection hose dia.** (in mm)
1: $\varnothing 4 \times \varnothing 9$ *2: $\varnothing 4 \times \varnothing 6$ *3: $\varnothing 6 \times \varnothing 8$
4: $\varnothing 8 \times \varnothing 13$ *5: $\varnothing 9 \times \varnothing 12$
PVC braided hose (Standard)
• Teflon or polyethylene hose (Special specification)
- Controller**
R: Standard
Y: Digital/Analogue correspondence
- Special configuration**
NAE: Automatic air vent
55: High compression pump head, etc.

(FC/SH)

EHN - B 11 FC 2 R

- Drive unit code**
(Average power consumption)
B: 20W
C: 24W
- Diaphragm effective diameter**
11: 10mm
21: 20mm
31: 30mm
36: 35mm
- Wet-end material code**
FC, SH
- Connection hose dia.** (in mm)
Pump type FC 2: $\varnothing 4 \times \varnothing 6$ 6: $\varnothing 10 \times \varnothing 12$
SH 9: Rc 1/4
- Controller**
R: Standard
Y: Digital/Analogue correspondence

Specifications of pump (VC/VH)

Model		EHN-B11	EHN-B16	EHN-B21	EHN-B31	EHN-C16	EHN-C21	EHN-C31	EHN-C36	
Max. discharge capacity	mL/min	38	65	100	230	80	130	270	450	
	mL/shot	0.05 - 0.11	0.09 - 0.18	0.14 - 0.28	0.32 - 0.64	0.09 - 0.22	0.14 - 0.36	0.30 - 0.75	0.50 - 1.25	
Max. discharge pressure	MPa	1.0	0.70	0.40	0.20	1.0	0.70	0.35	0.20	
Stroke rate	spm	1 - 360								
Stroke length		50 - 100% (0.5 - 1.0mm)				40 - 100% (0.5 - 1.25mm)				
Connection (Hose dia.)	mm	Ø4 × Ø9			Ø8 × Ø13		Ø4 × Ø9		Ø8 × Ø13	
Power voltage		AC100 - 240V 50/60Hz single phase								
Air vent valve		○			×		○		×	
Accessory	Check valve	CA-1			CA-2-L		CA-1		CA-2	CA-2-L
	Braided hose	Ø4 × Ø9 or Ø8 × Ø13 made in PVC/3 m								

- The maximum discharge capacity of each model represents the figure when the pump is pumping clean water at maximum discharge pressure, rated voltage, ambient temperature, and 360 spm with stroke length 100%.
 - 0.12MPa or more discharge pressure is needed to prevent over feeding (0.05MPa or more for the EHN-B31 and C36).
If the discharge pressure is at or below the required MPa, install a check valve or back pressure valve.
- Operating condition: Liquid temperature range is 0 - 60 °C(0 - 40 °C for VC/VH)
Ambient temperature range is 0 - 40 °C

(FC/SH)

Model		EHN-B11	EHN-B21	EHN-C21	EHN-C31	EHN-C36
Max. discharge capacity	mL/min	38	100	130	270	410
	mL/shot	0.05 - 0.11	0.14 - 0.28	0.14 - 0.36	0.30 - 0.75	0.46 - 1.14
Max. discharge pressure	MPa	1.0	0.40	0.70	0.35	0.20
Stroke rate	spm	1 - 360				
Stroke length		50 - 100% (0.5 - 1.0mm)			40 - 100% (0.5 - 1.25mm)	
Connection	FC	Ø4 × Ø6			Ø10 × Ø12	
	SH	Rc 1/4				
Power voltage		AC100 - 240V 50/60Hz single phase				
Air vent valve		SH: ○		FC: ×		
Accessory		FC: BVC(Back pressure valve)			SH: CS-1S(Check valve)	

- The maximum discharge capacity of each model represents the figure when the pump is pumping clean water at maximum discharge pressure, rated voltage, ambient temperature, and 360 spm with stroke length 100%.
- Operating condition: Liquid temperature range is 0 - 60 °C (on condition that liquid quality is not changed by freezing, viscosity change, or slurry interfusion).

Specifications of controller

Model		R	Y
Operation mode	Mode	EXT (Pulse dividing or multiply)	
	Mode selection	EXT & START/STOP keys	
Control	Setting	<ul style="list-style-type: none"> • Manual stroke rate 1 - 360spm • EXT <ul style="list-style-type: none"> · Digital input operation Multiply 1 : n n=1 - 999 Dividing n : 1 n=1 - 999 	<ul style="list-style-type: none"> • Manual stroke rate 1 - 360spm • EXT <ul style="list-style-type: none"> · Digital input operation Multiply 1 : n n=1 - 999 Dividing n : 1 n=1 - 999 · Analogue input operation Set point 1 Amperage: 0 - 20 mA Stroke rate: 0 - 360 spm Set point 2 Amperage: 0 - 20 mA Stroke rate: 0 - 360 spm
	Setting method	3 operating keys	4 operating keys
	Stop	No voltage contact (Make off/Make on can be selected by changing controller setting)	
Display	4-digit LCD		
Input	Pulse	No voltage contact, Open collector	
	Stop	No voltage contact, Open collector	
Output	Sensor power	-	DC 12V 20mA or less
Power voltage	AC100 - 240V 50/60Hz single phase		

Optional accessories

Check valve

Mount the check valve at the end of discharge hose for the prevention of over feeding, backflow, and siphon action.

Note: CB type is an option.

CA type: Standard accessory



CB type: In-line type check valve. Install it between hoses.



CS type: Stainless type for high liquid temperature. General model and boiler model are available.



Model	Connection		Set press. MPa	Body	Material Spring	O-ring	Applicable pump	Wet end material code						
	IN	OUT												
CA-1VC-4	ø4xø9	R3/8, R1/2 Thread	0.17 ±0.04	PVC	Hastelloy C276	FKM	B11 · 16 · 21	VC						
CA-1VE-4	Hose						EPDM	C16 · 21	VH					
CA-1VC-4x6	ø4xø6						FKM		VC					
CA-1VE-4x6	Hose						EPDM		VH					
CA-2VC-8	ø8xø13 Hose	R3/8, R1/2 Thread	0.05 +0.04 -0.03	PVC	Hastelloy C276	FKM	C31	VC						
CA-2VE-8							EPDM		VH					
CA-2VCL-8							FKM	B31	VC					
CA-2VEL-8							EPDM	C36	VH					
CA-1VCH-4	ø4xø9 Hose	R3/8, R1/2 Thread	0.34 ±0.04	PVC	Hastelloy C276	FKM	B11 · 16 · 21	VC						
CA-1VEH-4							EPDM	C16 · 21	VH					
CA-1VH-4							EPDM		VH					
CB-1VC-4							ø4xø9 Hose	FKM	B11 · 16 · 21	VC				
CB-1VE-4	ø4xø9 Hose	EPDM	C16 · 21	VH										
CB-2VC-8	ø8xø13 Hose	ø8xø13 Hose	0.17 ±0.04	PVC	Hastelloy C276	FKM	C31	VC						
CB-2VE-8							EPDM		VH					
CB-2VCL-8							FKM	B31	VC					
CB-2VEL-8							EPDM	C36	VH					
CB-1VCH-4	ø4xø9 Hose	ø4xø9 Hose	0.34 ±0.04	PVC	Hastelloy C276	FKM	B11 · 16 · 21	VC						
CB-1VEH-4							EPDM	C16 · 21	VH					
CS-1S							Rc1/4 Thread	Rc1/4 Thread	0.2 ±0.03	SUS316	Hastelloy C276	—	B11 · 21 C21 · 31 C36	SH
CS-1SL									0.05 ±0.03					
CS-1E	ø4xø6 Hose	R3/8 Thread	0.12 ±0.04	SUS304	Hastelloy C276	EPDM	B11 · 16 · 21 C16 · 21	VH						
CS-1E-2		R1/2 Thread												

Backflow prevention valve

Mount the backflow prevention valve at the end of discharge hose for the prevention of backflow.



Model	Connection		Material Body	Material Rubber	Applicable pump	Wet end material code
	IN	OUT				
CV-1VC-1	ø4xø9 Hose	R3/8, R1/2 Thread	PVC	FKM	B11 · 16 · 21 C16 · 21	VC
CV-1VE-1						EPDM
CV-1VC-2	ø4xø6 Hose	R3/8, R1/2 Thread	PVC	FKM	B11 · 16 · 21 C16 · 21	VC
CV-1VE-2						EPDM
CV-2VC-4	ø8xø13 Hose	R3/8, R1/2 Thread	PVC	FKM	B31 C31 · 36	VC
CV-2VE-4						EPDM

Back pressure valve

The back pressure valve enhances the dosing accuracy and prevents backflow. Set pressure is adjustable.



Model	Connection		Set press. MPa	Material			Applicable pump	Wet end material code
	IN	OUT		Body	Valve	O-ring		
BVC-1TV-4H	ø4xø6 Hose	R3/8, R1/2 Thread	0.2 ±0.02	PVDF	FKM	Note	B11 · 21 C21	FC
BVC-1TV-10H	ø10xø12 Hose		0.1 ±0.02				C36	
BVC-1TV-8H	ø8xø12 Hose		0.2 ±0.02				C31	
BVC-1PVL-8H	ø8xø13 Hose	R3/8, R1/2 Thread	0.2 ±0.02	PVC	FKM	FKM	C31	VC
BVC-1PEL-8H					EPDM	EPDM		VH

• Gasket (made in PTFE)

Accumulator

Mount the accumulator on discharge side hose to reduce vibration comes from pulsation.



Model	Connection		Capacity ml	Material Body	Material		Applicable pump	Wet end material code
	IN	OUT			Vladar	O-ring		
AQ-V-1	ø4xø9 Hose	ø4xø9 Hose	66	PVC	FKM	FKM	B11 · 16 · 21 C16 · 21	VC
AQ-E-1					EPDM	EPDM		VH
AQ-V-2	ø4xø6 Hose	ø4xø6 Hose			FKM	FKM		VC
AQ-E-2					EPDM	EPDM		VH
AQ-V-4	ø8xø13 Hose	ø8xø13 Hose	66	PVC	FKM	FKM	B31 C31 · 36	VC
AQ-E-4					EPDM	EPDM		VH

Hose flange

The hose flange is the adapter for connecting hose to flange. Hose flange with the check valve is also available.



Model	Connection		Material Body	Material Check valve model	Applicable pump	Wet end material code
	Hose	Flange				
15FCA-1VC	ø4xø9	JIS10K15AFF	PVC	CA-1VC	B11 · 16 · 21 C16 · 21	VC
15FCA-1VE				CA-1VE	VH	
15FCA-2VC				CA-2VC	VC	
15FCA-2VE				CA-2VE	VH	
15F×4	ø4xø9	JIS10K15A	PVC	—	B11 · 16 · 21 C16 · 21	—
15FS×4				—	—	
15F×8	ø8xø13	JIS10K15AFF	PVC	—	B31 C31 · 36	—
20FCA-1VC				CA-1VC	B11 · 16 · 21 C16 · 21	VC
20FCA-1VE				CA-1VE	VH	
20FCA-2VC				CA-2VC	VC	
20FCA-2VE	ø8xø13	JIS20K20AFF	PVC	CA-2VE	C31	VH
20F×4				—	B11 · 16 · 21 C16 · 21	—
20F×8	ø8xø13	JIS20K20AFF	PVC	—	B31 C31 · 36	—

• Please ask us for ø4xø6, ø9xø12 connection.

Hose joint

The hose joint offers a secure connection between hose and pipe.



Thread connection

Model	Connection		Material Body	Applicable pump	Wet end material code
	Hose	Thread			
V4-3/8-1	ø4×ø9	3/8	PVC	B11 · 16 · 21 C16 · 21	VC VH
V4-1/2-1		1/2			
V8-3/8-4		3/8			
V8-1/2-4	ø8×ø13	1/2		B31 C31 · 36	

VP plumbing connection

Model	Connection		Material Body	Applicable pump	Wet end material code
	Hose	VP plumbing			
V4-16-1	ø4×ø9	VP16	PVC	B11 · 16 · 21 C16 · 21	VC VH
V4-20-1		VP20			
V8-16-4		VP16			
V8-20-4	ø8×ø13	VP20		B31 C31 · 36	

- ø4×ø6, ø9×ø12 connection is prepared.

Air vent valve

Use the air vent valve for the B31, C31, and C36 types as necessary.



Model	Connection		Material		Applicable pump	Wet end material code
	Hose	Body	Rubber	Body		
AV-E30/35VC-4	ø8×ø13	PVC	FKM	PVC	B31 · C31 · 36	VC
AV-E30/35V6-4			EPDM			VH

- Please contact to Iwaki for 9×12 connection.

Multifunction valve

The multifunction valve functions as a back pressure valve, air vent valve, and relieve valve. The set pressure of the back pressure valve is fixed to 0.2MPa.



Model	Connection		Material			Applicable pump	Wet end material code
	Hose	Body	Diaphragm	Rubber	Body		
MFV-SVC-1	ø4×ø9	PVC	PTFE+EPDM	FKM	PVC	B11 · 16 · 21 C16 · 21	VC
MFV-SVH-1				EPDM			VH

Strainer with a foot valve

Mount the strainer at the end of suction hose. The strainer with a foot valve prevents backflow and foreign matter interfusion. Inlet bore can be selected according to hose bore.



Model	Connection		Material			Applicable pump	Wet end material code
	Hose	Strainer	Body	Valve ball	Rubber		
FSV-4x9	ø4×ø9	Aflon	PVC	Alumina ceramic	FKM	B11 · 16 · 21, C16 · 21 B31, C31 · 36	VC
FSV-8x13	ø8×ø13						
FSE-4x9	ø4×ø9						
FSE-8x13	ø8×ø13			Hastelloy C276	EPDM	B11 · 16 · 21, C16 · 21 B31, C31 · 36	VH

- For ø4×ø6 and ø9×ø12, contact us.
- PVDF strainers (FSTC type) are also available.
- Mesh size is 20 mesh.

Foot valve with a strainer

Mount the foot valve at the end of suction hose. The foot valve with a strainer and a ceramic weight ball prevents backflow and foreign matter interfusion. Inlet bore can be selected according to hose bore.



Model	Connection		Material			Applicable pump	Wet end material code
	Hose	Strainer	Body	Valve ball	Rubber		
FSC-4x6	ø4×ø6	PE	PVC	Alumina ceramic	FKM	B11 · 16 · 21 C16 · 21	VC
FSC-4x9	ø4×ø9						
FSC-8x13	ø8×ø13						

- For ø9×ø12, contact us.
- Mesh size is 150 mesh.

Reducing joint

Use the reducing joint to a connection between different bore hoses.



Model	Connection		Material		Applicable pump	Wet end material code
	Hose	Hose	Body	O-ring		
HJ-1/2V	ø4×ø9	ø4×ø6	PVC	FKM	B11 · 16 · 21 C16 · 21	VC
HJ-1/18V		ø6×ø11				
HJ-2/3V		ø6×ø8				

- VH type is available as option.
- Same bore hoses are available as option.

T-joint

Use T-joint for a branch pipe.



Model	Connection		Material Body	Applicable pump	Wet end material code
	Hose	Body			
TJ-4H	ø4×ø9	PVC	B11 · 16 · 21, C16 · 21 B31, C31 · 36	VC, VH	
TJ-8H	ø8×ø13				

Flow counter/Controller

The pressure sensor detects pulsation to monitor the flow. Air lock and hose disconnection are also can be detected.




Flow counter

Model	Material			Applicable controller	Applicable pump	Wet end material code
	Sensor	Body	Rubber			
FCP-1VC	Alumina ceramic	PVC	FKM	FCU-01 S3D2-CK	B11 · 16 · 21 C16 · 21	VC
FCP-1VE			EPDM			VH

Controller

Model	Electric specification				Applicable pump	Note
	power voltage	setting method	Output	Warning time		
S3D2-CK	AC100 - 240V	DIN Rail	relay output (1c)	0.1 - 1/1 - 10s	B11 · 16 · 21 · C16 · 21	Omron product

Dimensions (mm)

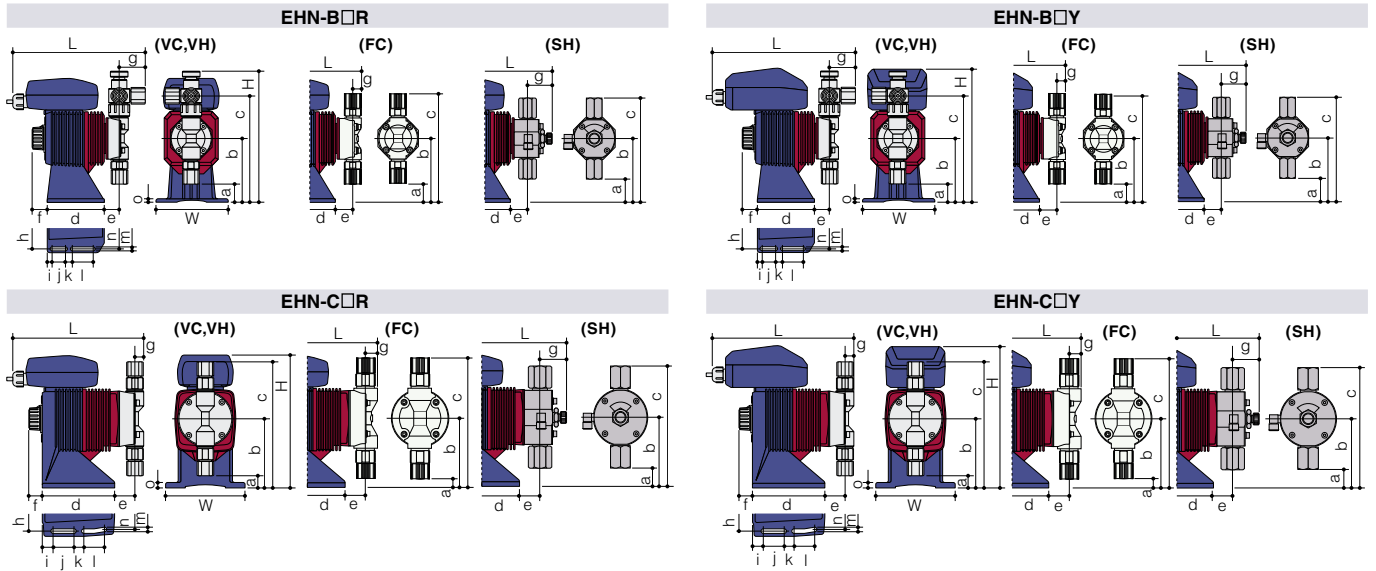

EHN-R (VC,VH)

Model	W	H	L	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
EHN-B11,16,21	100	(184)	(192)	(26)	90	(150)	81.5	(25)	(21)	(37)	88	7	16	10	32	6.2	88	5
EHN-B31	100	(174)	(174)	(8)	90	(172)	81.5	(27)	(21)	(16)	88	7	16	10	32	6.2	88	5
EHN-C16,21	116	(194)	(210.5)	(36)	100	(160)	105	(27)	(18)	(37)	100	8	37	15	30	7	95	8
EHN-C31	116	(189)	(191.5)	(17.5)	100	(182.5)	105	(29)	(18)	(16)	100	8	37	15	30	7	95	8
EHN-C36	116	(189)	(191)	(18)	100	(182)	105	(28.5)	(18)	(16)	100	8	37	15	30	7	95	8

EHN-R (FC,SH)

Model	W	H	L	a	b	c	d	e	f	g
EHN-B11,21FC	100	(174)	(167)	(27)	90	(153)	81.5	(25)	(21)	(12)
EHN-C21FC	116	(189)	(185.5)	(37)	100	(163)	105	(27)	(18)	(12)
EHN-C31FC	116	(189)	(191.5)	(18.5)	100	(181.5)	105	(29)	(18)	(16)
EHN-C36FC	116	(189)	(191)	(18.5)	100	(181.5)	105	(28.5)	(18)	(16)
EHN-B11,21SH	100	(174)	(188)	(34)	90	(146)	81.5	(24)	(21)	(34)
EHN-C21SH	116	(189)	(209)	(44)	100	(156)	105	(26)	(18)	(36.5)
EHN-C31SH	116	(189)	(209)	(34)	100	(166)	105	(28)	(18)	(34.5)
EHN-C36SH	116	(189)	(208.5)	(31)	100	(169)	105	(28)	(18)	(34)

EHN-Y (VC,VH)

Model	W	H	L	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
EHN-B11,16,21	100	(191)	(208.5)	(26)	90	(150)	81.5	(25)	(21)	(37)	88	7	16	10	32	6.2	88	5
EHN-B31	100	(191)	(189.5)	(8)	90	(172)	81.5	(27)	(21)	(16)	88	7	16	10	32	6.2	88	5
EHN-C16,21	116	(206.5)	(227)	(36)	100	(160)	105	(27)	(18)	(37)	100	8	37	15	30	7	95	8
EHN-C31	116	(206.5)	(208)	(17.5)	100	(182.5)	105	(29)	(18)	(16)	100	8	37	15	30	7	95	8
EHN-C36	116	(206.5)	(207.5)	(18.5)	100	(181.5)	105	(28.5)	(18)	(16)	100	8	37	15	30	7	95	8

EHN-Y (FC,SH)

Model	W	H	L	a	b	c	d	e	f	g
EHN-B11,21FC	100	(191)	(183.5)	(27)	90	(153)	81.5	(25)	(21)	(12)
EHN-C21FC	116	(206.5)	(202)	(37)	100	(163)	105	(27)	(18)	(12)
EHN-C31FC	116	(206.5)	(208)	(18.5)	100	(181.5)	105	(29)	(18)	(16)
EHN-C36FC	116	(206.5)	(207.5)	(18.5)	100	(181.5)	105	(28.5)	(18)	(16)
EHN-B11,21SH	100	(191)	(204.5)	(34)	90	(146)	81.5	(24)	(21)	(34)
EHN-C21SH	116	(206.5)	(225.5)	(44)	100	(156)	105	(26)	(18)	(36.5)
EHN-C31SH	116	(206.5)	(225.5)	(34)	100	(166)	105	(28)	(18)	(34.5)
EHN-C36SH	116	(206.5)	(225)	(31)	100	(169)	105	(28)	(18)	(34)

www.iwakupumps.jp

IWAKI CO.,LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892

EUROPE / U.S.A.

European office : IWAKI Europe GmbH	TEL: (49)2154 9254 0	FAX: 2154 9254 48
Austria : IWAKI (Austria) GmbH	TEL: (41)26 674 93 00	FAX: 26 674 93 02
Belgium : IWAKI Belgium N.V.	TEL: (32)13 67 02 00	FAX: 13 67 20 30
Denmark : IWAKI Nordic A/S	TEL: (45)48 24 2345	FAX: 48 24 2346
Finland : IWAKI Suomi Oy	TEL: (358)9 2745810	FAX: 9 2742715
France : IWAKI France S.A.	TEL: (33)1 69 63 33 70	FAX: 1 64 49 92 73
Germany : IWAKI Europe GmbH	TEL: (49)2154 9254 50	FAX: 2154 9254 55
Holland : IWAKI Holland B.V.	TEL: (31)547 293 160	FAX: 547 292 332
Italy : IWAKI Italia S.R.L.	TEL: (39)02 990 3931	FAX: 02 990 42888
Norway : IWAKI Norge AS	TEL: (47)66 81 16 60	FAX: 66 81 16 61
Spain : IWAKI Iberica Pumps, S.A.	TEL: (34)943 630030	FAX: 943 628799
Sweden : IWAKI Sverige AB	TEL: (46)8 511 72900	FAX: 8 511 72922
Switzerland : IWAKI (Schweiz) AG	TEL: (41)26 674 93 00	FAX: 26 674 93 02
U.K. : IWAKI Pumps (UK) Ltd.	TEL: (44)1743 231363	FAX: 1743 366507
U.S.A. : IWAKI America Inc.	TEL: (1)508 429 1440	FAX: 508 429 1386

ASIA / OCEANIA

Australia : IWAKI Pumps Australia Pty Ltd.	TEL: (61)2 9899 2411	FAX: 2 9899 2421
China		
Hong Kong : IWAKI Pumps Co., Ltd.	TEL: (852)2607 1168	FAX: 2607 1000
Shanghai : IWAKI Pumps (Shanghai) Co., Ltd.	TEL: (86)21 6272 7502	FAX: 21 6272 6929
Guangzhou : GFTZ IWAKI Engineering & Trading Co., Ltd.	TEL: (86)20 8435 0603	FAX: 20 8435 9181
Beijing : GFTZ Iwaki Engineering & Trading Co., Ltd. (Beijing office)	TEL: (86)10 6442 7713	FAX: 10 6442 7712
Korea : IWAKI Korea Co., Ltd.	TEL: (82)2 2630 4800	FAX: 2 2630 4801
Malaysia : IWAKI Sdn. Bhd.	TEL: (60)3 7803 8807	FAX: 3 7803 4800
Singapore : IWAKI Singapore Pte Ltd.	TEL: (65)6316 2028	FAX: 6316 3221
Indonesia : IWAKI Singapore (Indonesia Branch)	TEL: (62)21 6906606	FAX: 21 6906612
Taiwan : IWAKI Pumps Taiwan Co., Ltd.	TEL: (86)2 8227 6900	FAX: 2 8227 6818
Thailand : IWAKI (Thailand) Co., Ltd.	TEL: (66)2 322 2471	FAX: 2 322 2477
Vietnam : IWAKI Pumps Vietnam Co., Ltd.	TEL: (84)613 933456	FAX: 613 933399

() Country codes

⚠ Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly. Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

⚠ Legal attention related to export.

Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries.