

FLO-VU[®] Sight Flow Indicators

**Guaranteed Not To Leak*




APPROVED



**High Pressure & Temperature Rated
excellent safety & reliability**

ETHYLENE

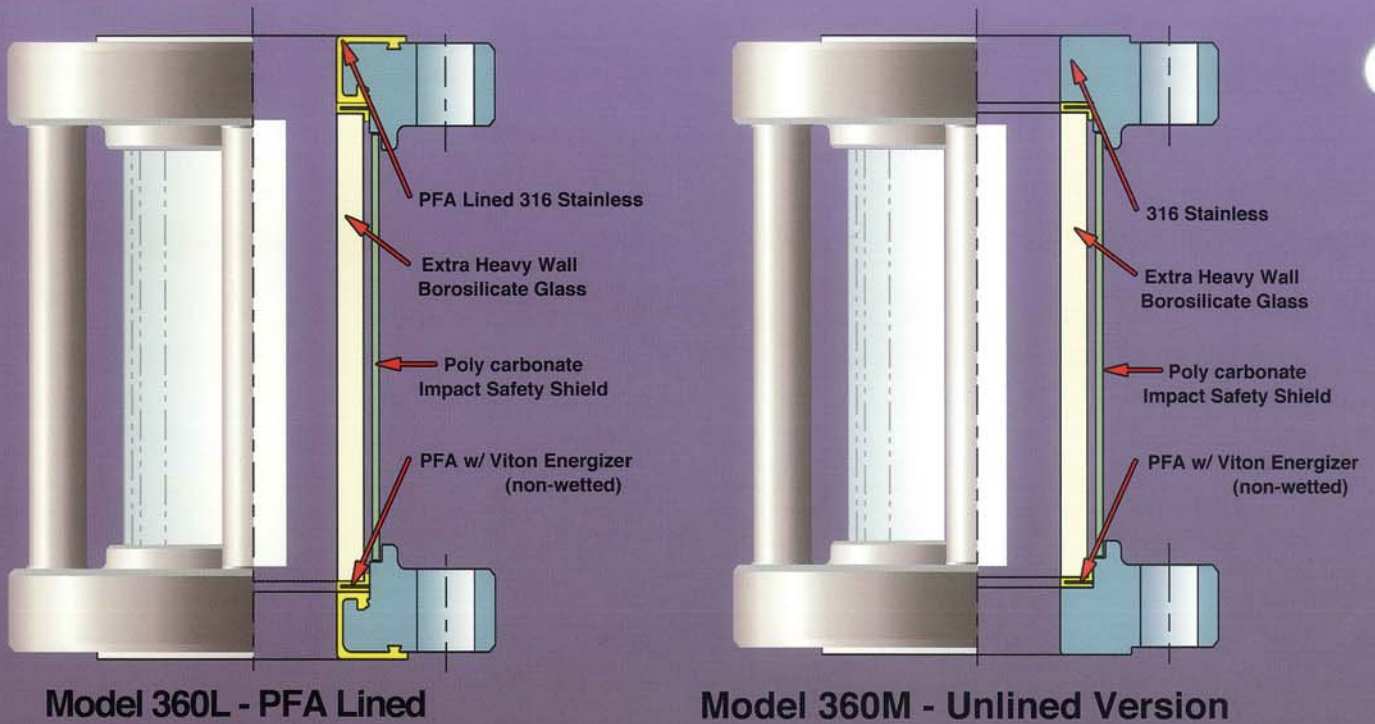

For more information request brochure # 3800 or visit www.ethylene.com

- **Size Range**
1" - 12" up to 50" Long
- **Pressure Rating**
Full Vacuum to 150 psig
- **Operating Temperature**
(-) 20°F to 350°F (-29°C to 177°C)
- **100% Tested**
Each unit is subjected to a 225 psig hydrostatic pressure test and a 150 psig helium bubble test before shipment
- **Lexan® Impact Shield**
A Lexan outer safety shield with an unobstructed 360° view is provided on FLO-VU 360L and 360M to protect the glass from external damage and to provide scatter protection

Standard Features

- **PFA and Glass Wetted Surfaces**
PFA and borosilicate glass wetted surfaces offer high temperature with maximum corrosion resistance and absolute product purity
- **Energized Seal Design**
PFA / Viton Energizer gasket provides a secure, bubble-tight seat even in applications with extreme thermal cycling
- **Rugged Construction**
All FLO-VU sight indicators have heavy-duty tie rods and flanges to limit deformation under heavy external loads and reduce glass stress

FLO-VU®
Standard
PFA Lined or Unlined 316 s.s.



FLO-VU®
Durcor-62™ Composite
Flanges



FLO-VU®
Double-Sure™
Double Contained



FLO-VU®
Pure-Vu™
Sanitary Tri-Clamp

