



ISO Registered Company

# MODELS CA-1 & CA-2

## TECHNICAL BULLETIN

CA-TB  
08-21



MODEL CA-1



### CAUTION

This is not a safety device and must not be substituted for a code approved pressure safety relief valve or a rupture disc.

## MODEL CA-1

### BACK PRESSURE / RELIEF REGULATOR

The Model CA-1 is a compact bronze or stainless steel back pressure regulator used to control inlet pressure level between atmospheric and 400 psig (27.6 Barg) by relieving excess pressure.

### FEATURES

- Self-Aligning Plug/Seat:** Seat ring floats within mechanically-contained zone.
- Tight Shutoff:** Lapped seat surfaces allow for leakage rates to approach levels of composition seats.

### APPLICATIONS

Widely used in liquid recirculation around a pump. Used as a bypass flow regulator in fuel oil systems. For general air, oil, water, and gas services. May be used in cryogenic gas or liquids or sour gas service. Use stainless steel only for sour gas service. Not recommended for steam service.

### STANDARD/GENERAL SPECIFICATIONS

**Body Size:** 1/8" or 1/4" (DN6 or 8) with NPT female pipe threads. Inlet connection size is equal to outlet connection size.

**Body Orientation:** Three to choose from:  
Globe: Side inlet, side outlet.  
Angle: Side inlet, bottom outlet.  
Flow-Thru: Two side inlets, bottom outlet.

**Body Material:** ASTM B62 C83600  
 (may substitute with ASTM B16 C36000)  
 ASTM A479 S31600/S31603

**Spring Chamber Material:** ASTM B62 C83600  
 ASTM A479 S31600/S31603

**Diaphragm:** Metal – 302 SST. or Phos. Bronze  
 Composition – Buna-N  
 See Table 2.

**Seat:** Metal – 303 SST. See Table 2.  
 Brass B16- See Table 2

**Gaskets:** PTFE

**Temperature Range:** See Table 2.

**Maximum Design Pressure:** See Table 1.

**Range Springs:**

Spring Ranges	
psig	(Barg)
2 - 15	(.14 - 1.0)
2 - 30	(.14 - 2.1)
10 - 50	(.69 - 3.5)
40 - 90	(2.8 - 6.2)
40-125	(2.8 - 8.6)
100-175	(6.9-12.0)
150-400	(10.3-27.6)

**Cv's / Capacities:** Upto 0.46Cv(0.40kv) (See Table 4.)

## OPTION SPECIFICATIONS

**Option-2:** HANDWHEEL. Plastic handwheel for frequent set point changes.

**Option-5:** CRYOGENIC CONSTRUCTION. Metal diaphragm with B0 or S2 Trim only. SST adjusting screw. Cleaned for oxygen service per Cashco Spec. #S-1134. Applicable temperature range -325° to +300°F (-198° to +149°C). Mount in horizontal piping with adjusting screw oriented downwards.

**Option-36:** SST CRYOGENIC CONSTRUCTION: Same specifications as Option -5, except with SST body/spring chamber material.

**Option-40:** SST NACE CONSTRUCTION. Internal wetted portions meet NACE standard MR0175 when the exterior of the regulator is not directly exposed to a sour gas environment, buried, insulated or otherwise denied direct atmospheric exposure. SST body/spring chamber material only. S40G only trim selection available.

**Option-55:** SPECIAL CLEANING. Cleaned per Cashco Spec. #S-1134 for oxygen service. **NOTE:** S2 trim limits design pressure rating to 375 psig (26 Barg).

**Option-56:** SPECIAL CLEANING. Cleaned per Cashco Spec. #S-1542. Not suitable for oxygen service.

## TECHNICAL SPECIFICATIONS

**TABLE 1**

CONTAINMENT PRESSURE VS. TEMPERATURE RATINGS PER ASME B31.3

See Table 2 for trim pressure/temperature limitations

Materials Body/Spring Chamber	Inlet & Outlet Pressure		Temperature	
	psi	(BAR)	°F	°C
BRZ/BRZ	525	36.2	-325 to 100	-198 to 38
	490	33.7	150	66
	470	32.4	200	93
	455	31.3	250	121
	435	30.0	300	149
	275	18.9	400	204
SST/SST	525	36.2	-425 to 600	-254 to 315

**TABLE 2**

TRIM MATERIAL COMBINATIONS

Part	Trim Designation Number			
	S2	S2B	S40G NACE	B0
Diaphragm	302 SST	Buna-N	Gylon	Phos. Bronze
Gaskets	PTFE	N/A	N/A	PTFE
Plug	303 SST	303 SST	316 SST	Brass B16
Seat Ring	303 SST	303 SST	316 SST	Brass B16
Pressure Plate Nut & Lock Washer	SST	SST	SST	SST
Pressure Plate	Brass	Brass	Brass	Brass
Diaphragm Stop	Brass	Brass	Brass	Brass
Spring Button	Brass	Brass	Brass	Brass
Range Spring	SST	SST	SST	SST
Adjusting Screw & Lock Nut	Plated CS (std) or SST (cryo)	Plated CS	Plated CS	Plated CS (std) or SST (cryo)
Maximum Working Pressure	400 psi 27.6 BAR	400 psi 27.6 BAR	400 psi 27.6 BAR	400 psi 27.6 BAR
Standard Temperature Range	-20 to 300°F -29 to 149°C	-20 to 200°F -29 to 93°C	-20 to 300°F -29 to 149°C	-20 to 300°F -29 to 149°C
Cryogenic Temperature Range	-325 to 300°F -198 to 149°C	N/A	N/A	-325 to 300°F -198 to 149°C

**TABLE 3**

**CAPACITY - Cv (F<sub>L</sub> = 0.90)  
1/8" or 1/4" (DN6 or DN8) Sizes**

Setpoint (P <sub>1</sub> ) Pressure		Metal Diaphragm % Build				Composition Diaphragm % Build				Wide Open
psig	(Barg)	5%	10%	20%	30%	5%	10%	20%	30%	
25	(1.72)	.03	.08	.20	.30	.05	.10	.24	.38	
50	(3.44)	.08	.19	.25	.36	.11	.24	.32	.46	
100	(6.9)	.07	.16	.24	.34	.09	.20	.30	.44	
150	(10.3)	.07	.16	.25	.36	.09	.20	.32	.46	
250	(17.2)	.08	.18	.22	.30	.08	.20	.24	.34	
300	(20.7)	.06	.16	.20	—	.07	.18	.22	—	
345	(23.8)	.07	—	—	—	.08	—	—	—	

**METRIC CONVERSION FACTOR: Cv / 1.16 = kv**

**TABLE 4 — AIR CAPACITY – SCFH**  
**S.G. = 1.0 T = 60°F F<sub>L</sub> = 0.90**  
**All Sizes – Composition Diaphragm Only**

Outlet Pressure (psig)	Setpoint Pressure (psig)	1/8" (DN6) Body % Build				1/4" (DN8) Body % Build			
		5%	10%	20%	30%	5%	10%	20%	30%
ATM	10	40	80	210	340	40	80	210	340
	25	70	150	380	630	70	150	380	630
	50	260	590	850	1300	260	590	850	1300
	100	380	880	1430	SONIC	380	880	1430	2250
	150	550	1270	SONIC	SONIC	550	1270	2210	2250
	250	790	SONIC	SONIC	SONIC	790	2050	2680	2250
	300	820	SONIC	SONIC	HI BUILD	820	2200	SONIC	HI BUILD
345	1070	HI BUILD	HI BUILD	HI BUILD	1070	HI BUILD	HI BUILD	HI BUILD	
25	50	250	560	800	1220	250	560	800	1220
	100	380	880	1430	2250	380	880	1430	2250
	150	550	1270	2210	3420	550	1270	2210	3420
	250	790	2050	2680	4100	790	2050	2680	4100
	300	820	2200	2920	HI BUILD	820	2200	2920	HI BUILD
	345	1070	HI BUILD	HI BUILD	HI BUILD	1070	HI BUILD	HI BUILD	HI BUILD
50	100	360	830	1350	2120	360	830	1350	2120
	150	540	1260	2190	3380	540	1260	2190	3380
	250	790	2050	2680	4100	790	2050	2680	4100
	300	820	2200	2920	HI BUILD	820	2200	2920	HI BUILD
	345	1070	HI BUILD	HI BUILD	HI BUILD	1070	HI BUILD	HI BUILD	HI BUILD
100	150	460	1070	1850	2860	460	1070	1850	2860
	250	770	2010	2610	4000	770	2010	2610	4000
	300	810	2180	2900	HI BUILD	810	2180	2900	HI BUILD
	345	1070	HI BUILD	HI BUILD	HI BUILD	1070	HI BUILD	HI BUILD	HI BUILD
150	250	700	1820	2380	3630	700	1820	2380	3630
	300	770	2070	2750	HI BUILD	770	2070	2750	HI BUILD
	345	1030	HI BUILD	HI BUILD	HI BUILD	1030	HI BUILD	HI BUILD	HI BUILD

**NOTE:** Where "SONIC" is indicated within the above capacity tables, outlet velocity with Schedule 40 pipe has reached sonic velocity of 1118 fps. Additional flow cannot be obtained, and pipeline velocity is in excess of customary pipe velocity design limits. Max. flow will be approximately the last indicated value in the column above "SONIC".


**METRIC CONVERSION FACTORS:** psig / 14.5 = Barg; SCFH / 35.31 = Sm<sup>3</sup>/Hr; SCFH / 37.32 = Nm<sup>3</sup>/Hr

**TABLE 5 — WATER CAPACITY – GPM**  
**S.G. = 1.0 T = 60°F F<sub>L</sub> = 0.90**  
**All Sizes – Composition Diaphragm Only**


Outlet Pressure (psig)	Setpoint Pressure (psig)	1/8" (DN6) Body % Build				1/4" (DN8) Body % Build			
		5%	10%	20%	30%	5%	10%	20%	30%
0	10	0.1	0.3	0.8	1.3	0.1	0.3	0.8	1.3
	25	0.3	0.5	1.4	1.9	0.3	0.5	1.4	1.9
	50	0.7	1.6	2.2	3.3	0.7	1.6	2.2	3.3
	100	0.8	1.9	3.2	4.5	0.8	1.9	3.2	4.5
	150	1.0	2.3	3.9	5.8	1.0	2.3	3.9	5.8
	250	1.2	3.0	3.7	5.5	1.2	3.0	3.7	5.5
	300	1.1	2.9	3.8	HI BUILD	1.1	2.9	3.8	HI BUILD
	345	1.4	HI BUILD	HI BUILD	HI BUILD	1.4	HI BUILD	HI BUILD	HI BUILD
5	10	0.1	0.2	0.6	1.0	0.1	0.2	0.6	1.0
	25	0.2	0.5	1.3	2.0	0.2	0.5	1.3	2.0
	50	0.8	1.7	2.2	3.3	0.8	1.7	2.2	3.3
	100	0.8	1.9	3.2	4.5	0.8	1.9	3.2	4.5
	150	1.0	2.3	3.9	5.8	1.0	2.3	3.9	5.8
	250	1.2	3.0	3.7	5.5	1.2	3.0	3.7	5.5
	300	1.1	2.9	3.8	HI BUILD	1.1	2.9	3.8	HI BUILD
	345	1.4	HI BUILD	HI BUILD	HI BUILD	1.4	HI BUILD	HI BUILD	HI BUILD
10	25	0.2	0.4	1.1	1.8	0.2	0.4	1.1	1.8
	50	0.7	1.6	2.3	3.3	0.7	1.6	2.3	3.3
	100	0.8	1.9	3.2	4.5	0.8	1.9	3.2	4.5
	150	1.0	2.3	3.9	5.8	1.0	2.3	3.9	5.8
	250	1.2	3.0	3.7	5.5	1.2	3.0	3.7	5.5
	300	1.1	2.9	3.8	HI BUILD	1.1	2.9	3.8	HI BUILD
	345	1.4	HI BUILD	HI BUILD	HI BUILD	1.4	HI BUILD	HI BUILD	HI BUILD
15	25	0.2	0.4	1.0	1.6	0.2	0.4	1.0	1.6
	50	0.7	1.5	2.1	3.3	0.7	1.5	2.1	3.3
	100	0.9	1.9	3.2	4.5	0.9	1.9	3.2	4.5
	150	1.0	2.3	3.9	5.8	1.0	2.3	3.9	5.8
	250	1.2	3.0	3.7	5.5	1.2	3.0	3.7	5.5
	300	1.1	2.9	3.8	HI BUILD	1.1	2.9	3.8	HI BUILD
345	1.4	HI BUILD	HI BUILD	HI BUILD	1.4	HI BUILD	HI BUILD	HI BUILD	
25	50	0.6	1.3	1.9	2.9	0.6	1.3	1.9	2.9
	100	0.8	1.8	3.2	4.5	0.8	1.8	3.2	4.5
	150	1.0	2.3	3.9	5.8	1.0	2.3	3.9	5.8
	250	1.2	3.0	3.7	5.5	1.2	3.0	3.7	5.5
	300	1.1	2.9	3.8	HI BUILD	1.1	2.9	3.8	HI BUILD
	345	1.4	HI BUILD	HI BUILD	HI BUILD	1.4	HI BUILD	HI BUILD	HI BUILD

**METRIC CONVERSION FACTORS:** psig / 14.5 = Barg; GPM x 3.785 = LPM


## DIMENSIONS & WEIGHT

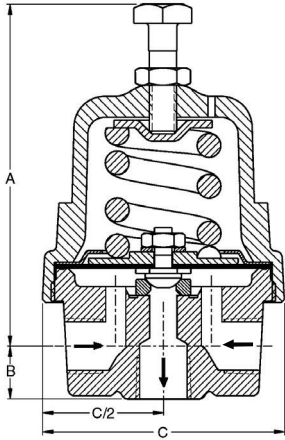

**FLOW-THRU BODY DESIGN**

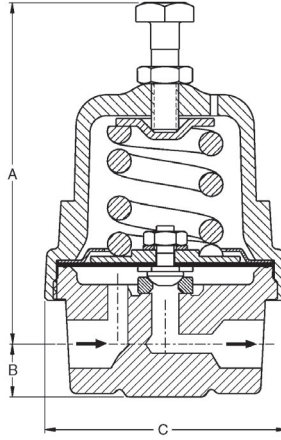

**GLOBE BODY DESIGN**

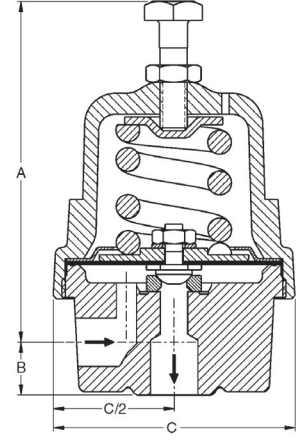

**ANGLE BODY DESIGN**

### ENGLISH UNITS – inches & lbs.

Option No.	DIMENSION - Inch			Weight - lbs.
	A	B	C *	
Std.	3.38	0.50	2.25	1.1
-2	3.69			
* Face to Face is 1.79".				

### METRIC UNITS – mm & kg

Option No.	DIMENSION - mm			Weight - kg.
	A	B	C *	
Std.	89	13	57	0.5
-2	94			
* Face to Face is 45 mm.				

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such product at any time without notice. Cashco, Inc. does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Cashco, Inc. product remains solely with the purchaser.

# MODEL CA-1 PRODUCT CODER 08/26/21

**A**1 POS 3 — POS 5 POS 6 & 7 **7** — **1** POS 11 **0** POS 13 **0****0** POS 16 **0****B**

POSITION 3 - SIZE			
Size		Connection Orientation	CODE
in	(DN)		
1/8"	(6)	Globe — side inlet side outlet	<b>1</b>
1/4"	(8)		<b>2</b>
1/8"	(6)	Angle — side inlet, bottom outlet	<b>B</b>
1/4"	(8)		<b>C</b>
1/8"	(6)	Flow-Thru — two side inlets, bottom outlet	<b>F</b>
1/4"	(8)		<b>G</b>

POSITION 5 - BODY / SPRING CHAMBER MATERIAL	
Material	CODE
Brass	<b>3</b>
SST *	<b>A</b>

\* Select for NACE

POSITION 6 & 7 - TRIM DESIGNATION NO.	
SST Trim	
Desig.	CODE
S2 *	<b>S2</b>
S2B	<b>SB</b>
S40G NACE	<b>SG</b>
B0 *	<b>B0</b>

\* Select For Cryogenic Service

POSITION 11 - RANGE SPRING		
psig	(Barg)	CODE
2 - 15	(.14 - 1.0)	<b>A</b>
2 - 30	(.14 - 2.1)	<b>B</b>
10 - 50	(.69 - 3.4)	<b>C</b>
40 - 90	(2.8 - 6.2)	<b>D</b>
40 -125	(2.8 - 8.6)	<b>E</b>
100 -175	(6.9-12.1)	<b>F</b>
150 -400	(10.3 -27.6)	<b>G</b>

POSITION 13 - FEATURE OPTIONS		
Description	Option	CODE
No Option	-	<b>0</b>
Handwheel *	-2	<b>2</b>

\* Not available with Cryogenic Construction.

POSITION 16 - CERTIFICATE OPTIONS		
Description	Option	CODE
No Option	—	<b>0</b>
Brass Cryogenic Constr. Includes Opt-55 - Special Cleaning. Must select trim No. B0 or S2.	-5	<b>5</b>
SST Cryogenic Constr. Includes Opt-55 - Special Cleaning. Must select trim No. S2.	-36	<b>6</b>
NACE Construction: SST/SST/SG Trim Per MR0175.	-40	<b>K</b>
Special Cleaning: Per Cashco Spec #S-1134. Suitable for oxygen service.	-55	<b>M</b>
Special Cleaning: Per Cashco Spec #S-1542.	-56	<b>N</b>

**\* For information on ATEX see pages 9 & 10 on the IOM.**



MODEL CA-2

**⚠ CAUTION**

This is not a safety device and must not be substituted for a code approved pressure safety relief valve or a rupture disc.

## MODEL CA-2

### BACK PRESSURE / RELIEF REGULATOR

The Model CA-2 is a compact bronze or stainless steel back pressure regulator used to control inlet pressure level between atmospheric and 610 psig (42.0 Barg) by relieving excess pressure.

### FEATURES

- Self-Aligning Plug/Seat:** Seat ring floats within mechanically-contained zone.
- Tight Shutoff:** Lapped seat surfaces allow for leakage rates to approach levels of composition seats.

### APPLICATIONS

Widely used in liquid recirculation around a pump. Used as a bypass flow regulator in fuel oil systems. For general air, oil, water, and gas services. May be used in cryogenic gas or liquids or sour gas service. Not recommended for steam service.

### STANDARD/GENERAL SPECIFICATIONS

- Body Size:** 1/4", 3/8" or 1/2" (DN8, 10 or 15) with NPT female pipe threads. Inlet connection size is equal to outlet connection size.
- Body Orientation:** Three to choose from:  
Globe: Side inlet, side outlet.  
Angle: Side inlet, bottom outlet.  
Flow-Thru: Two side inlets, bottom outlet.
- Body Material:** ASTM B62 C83600  
ASTM A479 S31600/S31603
- Spring Chamber Material:** ASTM B62 C83600  
ASTM A479 S31600/S31603
- Diaphragm:** Metal – 302 SST, Phosphor Bronze  
Composition – Buna-N.  
See Table 2.
- Seat:** Metal - 303 SST, Monel® R-405  
See Table 2.

- Gaskets:** PTFE
- Temperature Range:** See Table 2.
- Maximum Design Pressure:** See Table 1.
- Range Springs:**

Spring Ranges	
psig	(Barg)
3 - 30	(.21- 2.1)
30 - 50	(2.1 - 3.4)
50 - 80	(3.4 - 5.5)
80-150	(5.5-10.3)
150-250	(10.3-17.2)
250-400	(17.2-27.6)
300-610	(20.7-42.0)

**Cv's / Capacities:** Up to 0.97 Cv (0.84 kv) (See Table 4.)

## OPTION SPECIFICATIONS

- Option-1:** CLOSING CAP. Removable cap discourages tampering with range spring setting.
- Option-2:** HANDWHEEL. Plastic handwheel for frequent set point changes.
- Option-5:** CRYOGENIC CONSTRUCTION. Metal diaphragm S2 Trim only. SST adjusting screw. Cleaned for oxygen service per Cashco Spec. #S-1134. Applicable temperature range -325° to +300°F (-198° to +149°C). Mount in horizontal piping with adjusting screw oriented downwards.
- Option-22:** PANEL MOUNTING. Includes a locknut and a handwheel.
- Option -36:** SST CRYOGENIC CONSTRUCTION. Same specifications as Option -5, except with SST body/spring chamber material.
- Option-40:** SST NACE CONSTRUCTION. Internal wetted portions meet NACE standard MR0175 when the exterior of the regulator is not directly exposed to a sour gas environment, buried, insulated or otherwise denied direct atmospheric exposure. SST body/spring chamber material only. S40G only trim selection available.
- Option-55:** SPECIAL CLEANING. Cleaned per Cashco Spec. #S-1134 for oxygen service. **NOTE:** Design Pressure Rating limited to 375 psig (26 Barg) when used with S2, S2B, and S40G trim.
- Option-56:** SPECIAL CLEANING. Cleaned per Cashco Spec. #S-1542. Not suitable for oxygen service.

## TECHNICAL SPECIFICATIONS

**TABLE 1**

CONTAINMENT PRESSURE VS. TEMPERATURE RATINGS PER ASME B31.3

See Table 2 for trim pressure/temperature limitations

Materials Body/Spring Chamber	Inlet & Outlet-Pressure		Temperature	
	psi	(BAR)	°F	°C
BRZ/BRZ	610	42.0	-325 to 100	-198 to 38
	605	41.7	150	66
	600	41.3	200	93
	560	38.6	250	121
	530	36.5	300	149
	485	33.4	400	204
SST/SST	610	42.0	-425 to 600	-254 to 315

**TABLE 3**

**CAPACITY - Cv (F<sub>L</sub> = 0.90)  
1/8" or 1/4" (DN6 or DN8) Sizes**

Setpoint (P.) Pressure		Metal Diaphragm				Composition Diaphragm				Wide Open
		% Build				% Build				
psig	(Barg)	5%	10%	20%	30%	5%	10%	20%	30%	
10	(.69)	.13	.29	.51	.69	.19	.40	.70	.95	1.0
25	(1.72)	.14	.32	.55	.71	.20	.54	.75	.97	
50	(3.44)	.11	.26	.45	.68	.17	.36	.62	.90	
100	(6.9)	.11	.26	.45	.68	.15	.32	.55	.72	
150	(10.3)	.12	.27	.45	.65	.16	.35	.58	.78	
250	(17.2)	.12	.24	.38	.56	.14	.29	.53	.68	
300	(20.7)	.14	.29	.46	.67	.17	.35	.64	.82	
350	(24.1)	.17	.34	.53	.78	.20	.41	.74	.95	
400	(27.6)	.19	.38	.61	.90	.22	.46	.85	1.00	

**METRIC CONVERSION FACTOR: Cv / 1.16 = kv**

**TABLE 2**

TRIM MATERIAL COMBINATIONS

Part	Trim Designation Number			
	S2	S2B	S40G NACE	M7
Diaphragm	302 SST	Buna-N	Gylon	Phos. Brz.
Gaskets	PTFE	N/A	N/A	PTFE
Plug	303 SST	303 SST	316 SST	Monel® R-405
Seat Ring	303 SST	303 SST	316 SST	Monel® R-405
Pressure Plate Nut & Lock Washer	SST	SST	SST	SST
Pressure Plate	Brass	Brass	Brass	Brass
Diaphragm Stop	Brass	Brass	Brass	Brass
Spring Button	Brass	Brass	Brass	Brass
Range Spring	SST	SST	SST	SST
Adjusting Screw & Lock Nut	Plated CS (std) or SST (cryo)	Plated CS	Plated CS	Plated CS (std) or SST (cryo)
Maximum Working Pressure	610 psi 42.0 BAR	610 psi 42.0 BAR	610 psi 42.0 BAR	610 psi 42.0 BAR
Standard Temperature Range	-20 to 300°F -29 to 149°C	-20 to 200°F -29 to 93°C	-20 to 300°F -29 to 149°C	-20 to 300°F -29 to 149°C
Cryogenic Temperature Range	-325 to 300°F -198 to 149°C	N/A	N/A	-325 to 300°F -198 to 149°C

**TABLE 4 — AIR CAPACITY – SCFH**  
**S.G. = 1.0 T = 60°F F<sub>L</sub> = 0.90**  
**All Sizes – Composition Diaphragm Only**

Outlet Pressure (psig)	Setpoint Pressure (psig)	1/4" & 3/8" (DN8 & DN10) Body Size				1/2" (DN15) Body Size			
		% Build				% Build			
		5%	10%	20%	30%	5%	10%	20%	30%
0	10	170	360	660	930	170	360	660	930
	25	290	810	1190	1620	290	810	1190	1620
	50	400	890	1640	2540	400	890	1640	2540
	100	640	1410	2620	3690	640	1410	2620	3690
	150	980	2230	4000	SONIC	980	2230	4000	5790
	250	1380	2980	SONIC	SONIC	1380	2980	5920	8190
	300	1990	4280	SONIC	SONIC	1990	4280	SONIC	SONIC
	400	2710	SONIC	SONIC	SONIC	2710	5820	SONIC	SONIC
25	50	380	840	1540	2390	380	840	1540	2390
	100	630	1410	2620	3680	630	1410	2620	3680
	150	980	2230	4000	5790	980	2230	4000	5790
	250	1380	2980	5920	8190	1380	2980	5920	8190
	300	1990	4280	8510	11770	1990	4280	8510	11770
	350	2710	5820	11420	SONIC	2710	5820	11420	15840
	400	3400	7430	SONIC	SONIC	3400	7430	14930	18990
	100	600	1330	2470	3470	600	1330	2470	3470
50	150	970	2210	3960	5740	970	2210	3960	5740
	250	1380	2980	5920	8190	1380	2980	5920	8190
	300	1990	4280	8510	11770	1990	4280	8510	11770
	350	2710	5820	11420	15840	2710	5820	11420	15840
	400	3400	7430	14930	18990	3400	7430	14930	18990
	150	820	1870	3350	4850	820	1870	3350	4850
	250	1340	2910	5770	8000	1340	2910	5770	8000
	300	1970	4240	8430	11660	1970	4240	8430	11660
100	350	2700	5800	11380	15780	2700	5800	11380	15780
	400	3390	7420	14920	18970	3390	7420	14920	18970
	250	1220	2640	5250	7270	1220	2640	5250	7270
	300	1870	4030	8010	11090	1870	4030	8010	11090
	350	2630	5630	11060	15340	2630	5630	11060	15340
	400	3340	7300	14670	18660	3340	7300	14670	18660

NOTE: Where "SONIC" is indicated within the above capacity tables, outlet velocity with Schedule 40 pipe has reached sonic velocity of 1118 fps. Additional flow cannot be obtained, and pipeline velocity is in excess of customary pipe velocity design limits. Max. flow will be approximately the last indicated value in the column above "SONIC".

METRIC CONVERSION FACTORS: psig / 14.5 = Barg; SCFH / 35.31 = Sm<sup>3</sup>/Hr; SCFH / 37.32 = Nm<sup>3</sup>/Hr


**TABLE 5 — WATER CAPACITY – GPM**  
**S.G. = 1.0 T = 60°F F<sub>L</sub> = 0.90**  
**All Sizes – Composition Diaphragm Only**

Outlet Pressure (psig)	Setpoint Pressure (psig)	1/4" & 3/8" (DN8 & DN10) Body Size				1/2" (DN15) Body Size			
		% Build				% Build			
		5%	10%	20%	30%	5%	10%	20%	30%
0	10	0.6	1.3	2.4	3.4	0.6	1.3	2.4	3.4
	25	1.3	2.8	4.1	5.0	1.3	2.8	4.1	5.0
	50	1.1	2.4	4.3	6.5	1.1	2.4	4.3	6.5
	100	1.4	3.0	5.4	7.4	1.4	3.0	5.4	7.4
	150	1.8	4.0	7.0	9.8	1.8	4.0	7.0	9.8
	250	2.0	4.3	8.3	11.0	2.0	4.3	8.3	11.0
	300	2.7	5.7	10.9	14.6	2.7	5.7	10.9	14.6
	350	3.4	7.2	13.6	18.2	3.4	7.2	13.6	18.2
5	400	4.1	8.7	16.8	20.5	4.1	8.7	16.8	20.5
	10	0.4	1.0	1.9	2.7	0.4	1.0	1.9	2.7
	25	1.2	2.6	3.8	5.1	1.2	2.6	3.8	5.1
	50	1.2	2.5	4.3	6.5	1.2	2.5	4.3	6.5
	100	1.4	3.0	5.4	7.4	1.4	3.0	5.4	7.4
	150	1.8	4.0	7.0	9.8	1.8	4.0	7.0	9.8
	250	2.0	4.3	8.3	11.0	2.0	4.3	8.3	11.0
	300	2.7	5.7	10.9	14.6	2.7	5.7	10.9	14.6
10	350	3.4	7.2	13.6	18.2	3.4	7.2	13.6	18.2
	400	4.1	8.7	16.8	20.5	4.1	8.7	16.8	20.5
	25	1.0	2.3	3.4	4.6	1.0	2.3	3.4	4.6
	50	1.1	2.4	4.4	6.5	1.1	2.4	4.4	6.5
	100	1.4	3.0	5.4	7.4	1.4	3.0	5.4	7.4
	150	1.8	4.0	7.0	9.8	1.8	4.0	7.0	9.8
	250	2.0	4.3	8.3	11.0	2.0	4.3	8.3	11.0
	300	2.7	5.7	10.9	14.6	2.7	5.7	10.9	14.6
25	350	3.4	7.2	13.6	18.2	3.4	7.2	13.6	18.2
	400	4.1	8.7	16.8	20.5	4.1	8.7	16.8	20.5
	50	0.9	2.0	3.7	5.7	0.9	2.0	3.7	5.7
	100	1.3	3.0	5.4	7.4	1.3	3.0	5.4	7.4
	150	1.8	4.0	7.0	9.8	1.8	4.0	7.0	9.8
	250	2.0	4.3	8.3	11.0	2.0	4.3	8.3	11.0
	300	2.7	5.7	10.9	14.6	2.7	5.7	10.9	14.6
	350	3.4	7.2	13.6	18.2	3.4	7.2	13.6	18.2
400	4.1	8.7	16.8	20.5	4.1	8.7	16.8	20.5	


METRIC CONVERSION FACTORS: psig / 14.5 = Barg; GPM x 3.785 = LPM




## DIMENSIONS AND WEIGHTS

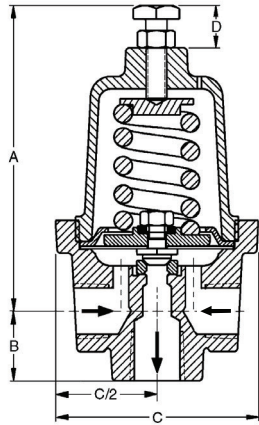

**FLOW-THRU BODY DESIGN**

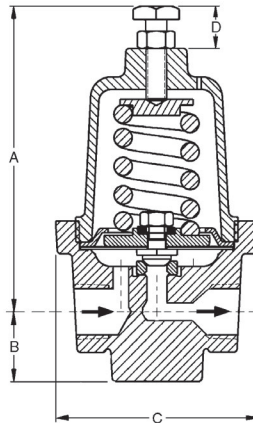

**GLOBE BODY DESIGN**

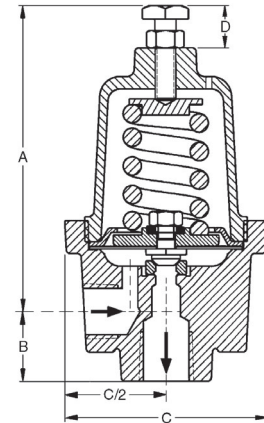

**ANGLE BODY DESIGN**

**ENGLISH UNITS – inches & lbs.**

Option No.	DIMENSION - Inch				Weight – lbs
	A	B	C *	D	
Std.	5.38	1.06	3.12	–	3.6
-1	5.75	1.06	3.12	–	
-2	5.69	1.06	3.12	–	
-22	5.69	1.06	3.12	1.88	
* Face to Face is 2.46".					

**METRIC UNITS – mm & kg**

Option No.	DIMENSION - mm				Weight – kg
	A	B	C *	D	
Std.	137	27	79	–	1.6
-1	146	27	79	–	
-2	145	27	79	–	
-22	145	27	79	48	
* Face to Face is 64 mm.					

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such product at any time without notice. Cashco, Inc. does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Cashco, Inc. product remains solely with the purchaser.

# MODEL CA-2 PRODUCT CODER 08/26/21

**A**2 POS 3 — POS 5 POS 6 & 7 **7** — **1** POS 11 **0** POS 13 **0** **0** POS 16 POS 17 **A**

POSITION 3 - SIZE			
Size		Connection Orientation	CODE
in	(DN)		
1/4"	(8)	Globe — side inlet side outlet	<b>2</b>
3/8"	(10)		<b>3</b>
1/2"	(15)		<b>4</b>
1/4"	(8)	Angle — side inlet, bottom outlet	<b>C</b>
3/8"	(10)		<b>D</b>
1/2"	(15)		<b>E</b>
1/4"	(8)	Flow-Thru — two side inlets, bottom outlet	<b>G</b>
3/8"	(10)		<b>H</b>
1/2"	(15)		<b>J</b>

POSITION 5 - BODY / SPRING CHAMBER MATERIAL	
Material	CODE
Brass	<b>3</b>
SST *	<b>A</b>
* Select for NACE	

POSITION 6 & 7 - TRIM DESIGNATION NO.	
Desig.	CODE
S2 *	<b>S2</b>
S2B	<b>SB</b>
S40G NACE	<b>SG</b>
M7 *	<b>M7</b>
* Select For Cryogenic Service	

POSITION 11 - RANGE SPRING		
psig	(Barg)	CODE
3 - 30	(.21-2.1)	<b>K</b>
30 - 50	(2.1 - 3.4)	<b>L</b>
50 - 80	(3.4 - 5.5)	<b>M</b>
80-150	(5.5 -10.3)	<b>N</b>
150-250	(10.3-17.2)	<b>P</b>
250-400	(17.2-27.6)	<b>S</b>
300-610	(20.7-42.0)	<b>T</b>

POSITION 13 - FEATURE OPTIONS		
Description	Option	CODE
No Option	-	<b>0</b>
Closing Cap.	-1	<b>1</b>
Handwheel *	-2	<b>2</b>
Panel Mounting - Includes Opt-2 *	-22	<b>C</b>
* Not available with Cryogenic Construction.		

POSITION 16 - CERTIFICATE OPTIONS		
Description	Option	CODE
No Option	—	<b>0</b>
<u>Brass Cryogenic Constr.</u> Includes special cleaning #S-1134. Must select trim No. S2 or M7.	-5	<b>5</b>
<u>SST Cryogenic Constr.</u> Includes special cleaning #S-1134. Must select trim No. S2 or M7.	-36	<b>6</b>
NACE Construction: SST/SST/SG Trim Per MR0175.	-40	<b>K</b>

POSITION 17 - CERTIFICATE OPTIONS		
Description	Option	CODE
No Option	—	<b>0</b>
Special Cleaning: Per Cashco Spec #S-1134. Suitable for oxygen service.	-55	<b>M</b>
Special Cleaning: Per Cashco Spec #S-1542.	-56	<b>N</b>

**\* For information on ATEX see pages 9 & 10 on the IOM.**

Cashco, Inc.  
P.O. Box 6  
Ellsworth, KS 67439-0006  
PH (785) 472-4461  
Fax. # (785) 472-3539  
www.cashco.com  
email: sales@cashco.com  
Printed in U.S.A. CA-TB

Cashco GmbH  
Handwerkerstrasse 15  
15366 Hoppegarten, Germany  
PH +49 3342 30968 0  
Fax. No. +49 3342 30968 29  
www.cashco.com  
email: germany@cashco.com

Cashco do Brasil, Ltda.  
Al.Venus, 340  
Indaiatuba - Sao Paulo, Brazil  
PH +55 11 99677 7177  
Fax. No.  
www.cashco.com  
email: brazil@cashco.com